

Catalog

Page 1 Brochure 2025 v2 (Dale)	1
Page 2 Brochure 2025	2
Page 3 Brochure 2025	3
Page 4 Brochure 2025	4
Page 5 Brochure 2025	5
Page 6 Brochure 2025	6
Page 7 Brochure 2025	7
Page 8 Brochure 2025	8
Page 9 Brochure 2025	9
Page 10 Brochure 2025	10
Page 11 Brochure 2025	11
page 12 Brochure 2025	12
Page 13 Brochure 2025	13
Page 14 Brochure 2025	14
Page 15 Brochure 2025	15
Page 16 Brochure 2025	16
Page 17 Brochure 2025	17
Page 18 Brochure 2025	18
Page 19 Brochure 2025	19
Page 20 Brochure 2025	20

Clamcleat®
Rope cleats



60 years
Anniversary
1965-2025

**Performance
Rope Holding**






PERFORMANCE ROPE HOLDING

Simple solutions for secure line management

Clamcleat® rope cleats offer a secure, efficient method for managing lines and cords. Whether on sailboats, kayaks or tents, or in industrial settings controlling conveyor belts or cargo nets, Clamcleats Ltd offer a reliable solution for securing and adjusting tension with ease.



Our mechanism is simple; serrated grooves act like teeth, engaging the line when pressure is exerted upon them. This tension holds the line firmly in place, until the tension is broken by a short upwards and backward pull, releasing the line from the jaw.

Made from durable materials and no moving parts to break or seize, Clamcleat® rope cleats will stand the test of time even in demanding conditions.

Durable materials you can trust

The robust construction of Clamcleat® ensure reliable performance in all sectors, with a range of materials available to suit any application:

Marine grade nylon offers great value for money, for both production builder and sailor alike. Nylon cleats are corrosion resistant and designed to endure the outdoors, ideal for most applications where high loads or rope surges are not likely to be encountered.

Aluminum cleats are strong and heat resistant. They are unaffected by the heat generated by surging ropes, whilst also maintaining their strength in sub-zero conditions. Their resistance to corrosion is also good.

All of our popular aluminum cleats are offered with a hard anodised finish. Anodisation not only provides an extra layer of protection against corrosion, but also improves appearance, minimizing the impact of scratches and blunt forces.



The AN suffix indicates a Hard Anodised finish.

Our extensive material research has shown aluminium to be far better for high performance cleats than any polymer, irrespective of fibre reinforcements or additives. These factors make aluminium cleats the best choice for demanding applications.

Customisation

Our standard colours are shown in this brochure, however special colours are available to order at request. Similarly, if there is a requirement for special models or adaptations to existing products, our designers are on hand ready to bring new ideas and applications to life. Our own in-house research and toolmaking facilities can bring your project to fruition.

Visit plasticmoulding.net to see our manufacturing capabilities and a selection of case studies.

Installation and applications

Most cleats are provided with countersunk fixing holes. Countersunk (flathead) screws or bolts of the recommended size should be used; bolts being preferred. If using rivets with a powered fixing gun, ensure the pressure is not set too high. Fastenings must be entered straight so the heads do not protrude and snag the rope. Several cleats have been designed with a groove in the base, enabling them to be fitted to both flat and curved surfaces. See page 19 for help with Installation.

Information about the company history




Whilst every effort is made to ensure that all specifications given in the technical information is correct, they shall not be deemed to be a representation or warranty on behalf of the company and the company shall not accept any liability for the accuracy thereof in any circumstances.
The name CLAMCLEAT and LINE-LOK are the registered trade marks of Clamcleats Ltd.

CAB35 Webbing Strap Guard	19	CL244 & CL111 Boom Cleat & Clamp	17	CL804 Tapered Pad for CL219, CL219AN, CL237 & CL238	14
CAB50 Webbing Strap Guard	19	CL244 & CL115 Boom Cleat & Clamp	17	CL805 Tapered Pad for CL205, CL220, CL239 & CL240	15
CL201 Vertical	14	CL244 + CL134 Boom Cleat & Clamp	17	CL806 Jiffy Tie	8
CL202 Horizontal	14	CL244/L Aluminium Insert Cleat	13	CL814 Keeper for CL203, CL217MK1, CL218MK1 & CL236	7
CL203 Junior	7	CL247 Compact Twin Sheave Cleat	13	CL815 Keeper Accessory for CL211 MK2, CL211 MK2AN, CL211 MK2/S2 & CL211 MK2AN/S2	6
CL203W/S1 Roller Fairlead White Junior	5	CL248 Cleat + Hook & 3 sheave	13	CL816 Cage for CL203, CL211 MK1, CL211 MK1AN, CL236 & CL236AN requires CL814 Keeper	7
CL203W/S2 Junior Roller W	5	CL249 Tug Cleat	12	CL817 Cage for CL211 MK2 & CL211 MK2AN, requires CL815 Keeper	6
CL204 & CL204W Mini	4	CL250 The Gap Closer	13	CL818 Tapered Pad for CL203, CL211 MK1, CL217 MK1, CL218 MK1, CL236, CL704 & CL704AN	7
CL205 Major	15	CL253 & CL253AN Hard Anodised Trapeze & Vang Cleat	5,8&13	CL819 Tapered Pad for CL211 MK2, CL217 MK2, CL218 MK2 & CL211 MK2/S2	6
CL206 Lateral (Starboard)	14	CL254 & CL254AN Hard Anodised Racing Midi	14	CL819 Tapered Pad for CL211 MK2, CL217 MK2, CL218 MK2 & CL211 MK2/S2	6
CL207 Lateral (Port)	14	CL255 & CL255AN Hard Anodised Omega Cleat	5	CL819 Tapered Pad for CL211 MK2, CL217 MK2, CL218 MK2 & CL211 MK2/S2	6
CL208 Clam-Bollard	15	CL257 Auto-Release Racing Mini	4	CL823 Tapered Pad for all Micros Cleats	4&6
CL209 Midi	14	CL258 & CL258AN Hard Anodised Racing Fine Line (Starboard)	4&11	CL825CKC & CL825CKCAN Twin Cleats	6
CL210 Clam-Bollard Major	15	CL259 & CL259AN Hard Anodised Racing Fine Line (Port)	4&11	CL826 Aero Cleat variants	10&12
CL211MK1 & CL211MK1AN Hard Anodised Racing Junior MK1	7	CL260 Line-Lok	9	CL827 Aero Cleat variants	10
CL211MK2 & CL211MK2AN Hard Anodised Racing Junior MK2	6&12	CL261 Power Grip 1	12	CL828 Aero Cleat variants	10&12
CL211MK2/S2 & CL211MK2AN/S2 Hard Anodised Racing Junior MK2 with Becket	6	CL262 Power Grip 2	12	CL829-11AN Aero Cleat	12
CL212 Leech Line Cleat	11	CL263 & CL263W Micros	6	CL830CKC & CL830CKCAN	6
CL212A Shield for CL212	11	CL264 & CL264AN Hard Anodised Cobra Cleat	8&12	CL832CKC & CL832CKCAN	6
CL212BP Backplate for CL212	11	CL265 & CL265AN Hard Anodised Bar Cleat	17	CL833CKC & CL833CKCAN	7
CL212BP Black Backplate for CL241AN, CL258AN & CL259AN	11	CL266 Mini Line-Lok®	9	CL834 Handle for CL253 Trapeze Cleat	5&8
CL213 Fine Line (Starboard)	4	CL267 Racing Sail Edge Cleat	11	CL835 Thru Tube Cleat	5
CL214 Fine Line (Port)	4	CL268 & CL268AN Hard Anodised Racing Micros	6&12	DH6NB, DH6NW & DH6W Inspection Access Cover	16
CL214W White Fine Line (Port)	11	CL269 Sail Edge Cleat	11	PT230SSE Eye for CL230 & CL253	5,8&13
CL215 Side-fixing Midi	14	CL270 & CL270AN Hard Anodised Racing Micros with Becket	6	PT300771 Mast Guyline Tensioning Reel	8
CL217MK1 & CL217MK1AN Hard Anodised Side Entry MK1 (Stbd)	7	CL271 Large Line-Lok®	9	PT401 & PT401W Rigid Inflatable Boat Hook	16
CL217MK2 & CL217MK2AN Hard Anodised Side Entry MK2 (Stbd)	7	CL272 & CL272W Juniors	6	PT403 T-Bar for Shockcord	16
CL218MK1 & CL218MK1AN Hard Anodised Side Entry MK1 (Port)	7	CL273 & CL273AN Hard Anodised Racing Sail Line cleat	5&11	PT404 Hook for Shockcord	16
CL218MK2 & CL218MK2AN Hard Anodised Side Entry MK2 (Port)	7	CL274 & CL274W Micros Cleat	4	PT405 & PT405W Hook	16
CL219, CL219VB & CL219AN Hard Anodised Racing Vertical	14	CL275 & CL275AN Hard Anodised Racing Micros	4	PT406 Loop for use with CL279, PT413-1 & PT414-9	18
CL220 & CL220VB Racing Major	15	CL276 Medium Line-Lok®	9	PT413-1 Tube Assembly	18
CL221 Dinghy Leech Line Cleat	11	CL277 & CL277AN Hard Anodised Side Entry Racing Micros with Becket (Starboard)	6	PT414-9 Yellow Rope	18
CL222 & CL222AN Hard Anodised Racing Mini	4	CL278 & CL278AN Hard Anodised Side Entry Racing Micros with Becket (Port)	6	PT416-1 Tube Assembly	18
CL223 & CL223W Loop Cleat	8	CL279 for Recycling Bags + Backplate + Screws	18	PT417-1 Tube Assembly	18
CL224S S/S Fairlead for CL205, CL220, CL239 & CL240	15	CL280CSK & CL280HEX Side Fixing Vertical Cleat	14	PT418 Clamp Containers	18
CL228 Vertical Integral Fairlead	14	CL281 & CL281W Sail Cleat (port)	5&11	PT420&21 Countersink & Base Insulator for CL211MK2 Range	4
CL230 & CL230AN Hard Anodised Racing Junior MK1 with Roller	5&8	CL282 Tie-down Cleat	8	PT422&23 Countersink & Base Insulator for CL211MK1 Range	4
CL231 Midi Integral Fairlead	14	CL283 & CL283W Sail Cleat	5&11	PT424&25 Countersink & Base Insulator for CL268, CL270 etc.	4
CL232 & CL232W Cub Cleat	5	CL284 & CL284AN Racing Junior MK2 Roller & Becket	5	PT428 Y Splitter	12
CL233 Sail Line Cleat	11	CL285 All Ali Aero Cleat	10&12	PT520 & PT520W Ball	16
CL233BP Backplate for CL233	11	CL5001 Q-Lok	5	PT524 Stopper Ball for 6mm	12&16
CL234 & CL234W Fender / Large Loop Cleat	8	CL702 & CL702AN Hard Anodised Boom Cleat	7	PT525 Stopper Ball for 8-9mm	12&16
CL235 Cleat & Integral Clamp	17	CL704 & CL704AN Hard Anodised Racing Junior MK1 + Becket	7	PT5107 Titanium Thimble	12&17
CL236 & CL236AN Hard Anodised Roller Fairlead racing MK1	5	CL708 Rivet-on Fitting for 6:1 Ratio	13	PT5110 Titanium Thimble	12&17
CL237 Vertical Spring Gate	15	CL710 Twin Insert Cleat	13	PT5115 Titanium Thimble	17
CL238 Racing Vertical Spring Gate	15	CL712 Small Insert Cleat	13	PT5120 Titanium Thimble	17
CL239 Major with Spring Gate	15	CL715 Insert Cleat	13		
CL240 Racing Major with Spring Gate	15	CL716 Mini Insert Cleat	13		
CL241 & CL241AN Hard Anodised Racing Sail Line Cleat (Port)	5&11	CL719 Trucker Hitch Cleat	17		
CL243/L Nylon Insert Cleat with CL243/S5 & Integral Clamp	17	CL802 Tapered Pad for CL204, CL222 & CL222AN	4		
CL244 Aluminium Boom Cleat & Clamps	13&17	CL803 Tapered Pad for CL209, CL254 & CL254AN	14		
CL244 & CL105 Boom Cleat & Clamp	17				



PERFORMANCE ROPE HOLDING

CSK & Base Insulator

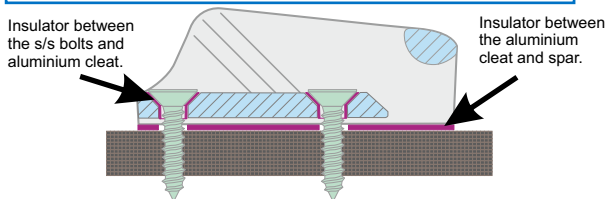

CSK & Base Insulator		mm Inch				
	A	B	C	mm Ø Inch Ø	mm Ø Gauge Ø	Gms Ozs
PT420&21						
Countersink for No8 (4.2mm) Bolts	10 25⁄64	- -	10 25⁄64	M4 #8-32	4.2 #8	0.025 0.001
Base Insulator for CL211Mk2 range	55 2 1⁄8	27 1 1⁄16	16 5⁄8	M4 #8-32	4.2 #8	0.45 0.018
PT422&23						
Countersink for No10 (4.8mm) Bolts	11.6 29⁄64	- -	11.6 29⁄64	M5 #10.24	4.8 #10	0.03 0.001
Base Insulator for CL211Mk1 CL217&8 Mk1, CL230, CL236 & CL704	82 3 3⁄4	66 2 5⁄8	18 1 1⁄16	M5 #10.24	4.8 #10	0.85 0.031
PT424&25						
Countersink for No4 (2.9mm) Bolts	9 23⁄64	- -	9 23⁄64	M3 #4	2.9 #4	0.012 0.001
Base Insulator for CL268, CL270, CL277 & CL278	44 1 3⁄4	24 1 5⁄16	13 1⁄2	M3 #4.40	2.9 #4	0.31 0.011

Micros & Mini



Micros & Mini Cleats	 mm Ø Inch Ø	A mm Inch	B mm Inch	C mm Inch	 mm Ø Inch Ø	 mm Ø Gauge Ø	 Gms Ozs
Mini CL204 (Nylon)	3-6 ⅛-¼	52 2 ⅛	36 1 7⁄16	17 ⅝	M4 #8	4.2 No8	9 0.3
Racing Mini CL222 CL222AN (Aluminium)	3-6 ⅛-¼	48 1 7⁄8	36 1 7⁄16	15 ⅝	M4 #8	4.2 No8	16 0.3
Micros CL274 CL274W (Nylon)	1-4 3⁄64-5⁄32	33 1 5⁄16	24 1 5⁄16	13 ½	M3 #4	3 No4	3 0.1
Racing Micros CL275 CL275AN (Aluminium)	1-4 3⁄64-5⁄32	33 1 5⁄16	24 1 5⁄16	13 ½	M3 #4	3 No4	3 0.25
Tapered Pad for CL204 & CL222 CL802 (Polypropylene)	-	57 2¼	- -	21 1⅜	M4 #8	4.2 No8	4 0.1
Tapered Pad for CL274 & CL275 CL823 (Polypropylene)	-	47 1⅞	- -	19 ¾	M3 #4	3.0 No4	4 0.15

Fine Line






Fine Line Cleats							
	mm Ø Inch Ø	A	B	C	mm Ø Inch Ø	mm Ø Gauge Ø	Gms Ozs
Fine Line (Starboard) CL213 (Nylon)	2 - 5	70 2¾	49 1⅝	21 1⅜	M4 #8	4.2 No8	9 0.3
Fine Line (Port) CL214 (Nylon)	2 - 5	70 2¾	49 1⅝	21 1⅜	M4 #8	4.2 No8	9 0.6
Racing Fine Line (Starboard) CL258 CL258AN (Aluminium)	3 - 6	70 2¾	49 1⅝	21 1⅜	M4 #8	4.2 No8	19 0.7
Racing Fine Line (Port) CL259 CL259AN (Aluminium)	3 - 6	70 2¾	49 1⅝	21 1⅜	M4 #8	4.2 No8	19 0.7


Auto-release




Auto-Release Cleats						
	mm Ø Inch Ø	A B B C	mm Inch	mm Ø Inch Ø	mm Ø Gauge Ø	Gms Ozs
Auto-Release Racing Mini CL257 (Aluminium + Acetal)	4 - 6 3/16-1/4	68 2 5/8	36 1 13/32	24 7/8	4 5/32	4 No8
						31 1.1


Roller Cleats			mm Inch			
	mm Ø Inch Ø	A B C		mm Ø Inch Ø	mm Ø Gauge Ø	Gms Ozs
Roller Fairlead White Junior CL203W/S1 (Nylon)	3 - 6 1/8-1/4	82 3 1/4 66 2 5/8 18 1 1/16		M4 #8	4.2 No8	17 0.6
White Junior with Roller CL203W/S2 (Nylon)	3 - 6 1/8-1/4	82 3 1/4 66 2 5/8 18 1 1/16		M4 #8	4.2 No8	17 0.6
Racing Junior Mk1 with Roller CL230	3 - 6 1/8-1/4	82 3 1/4 66 2 5/8 18 1 1/16		M5 #10	4.8 No10	35 1.2
CL230AN (Aluminium)	3 - 6 1/8-1/4	82 3 1/4 66 2 5/8 18 1 1/16		M5 #10	4.8 No10	40 1.4
Roller Fairlead Mk1 Racing Junior CL236	3 - 6 1/8-1/4	82 3 1/4 66 2 5/8 18 1 1/16		M5 #10	4.8 No10	46 1.6
CL236AN (Aluminium)	3 - 6 1/8-1/4	82 3 1/4 66 2 5/8 18 1 1/16		M5 #10	4.8 No10	46 1.6
Trapeze and Vang Cleat CL253	4 - 8 5/32-5/16	89 3 1/2 70 2 3/4 18 1 1/16		- -	- -	46 1.6
CL253AN (Aluminium)	4 - 8 5/32-5/16	89 3 1/2 70 2 3/4 18 1 1/16		- -	- -	46 1.6
Racing Junior Mk2 with Roller+Becket CL284	3 - 6 1/8-1/4	55 2 1/8 27 1 1/16 16 5/8		M4 #8	4.2 No8	25 0.9
CL284AN (Aluminium)	3 - 6 1/8-1/4	55 2 1/8 27 1 1/16 16 5/8		M4 #8	4.2 No8	25 0.9
Handle for CL253 Trapeze Cleat CL834 (Polypropylene)	-	- -	50 1 31/32	- -	- -	6.5 0.23
Thru Tube Sheave Plate For CL211Mk2 & CL272 Cleats CL835	3 - 6 1/8-1/4	86 3 3/4 27 1 1/16 25 1		M4 #8	4.2 No8	20 0.7
Eye for CL230 & CL253 PT230SSE (Stainless Steel)	-	- -	6 1/4 12 1/2	- -	- -	3.3 0.12

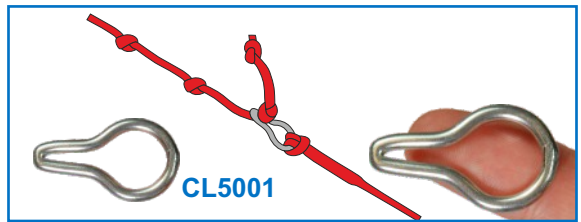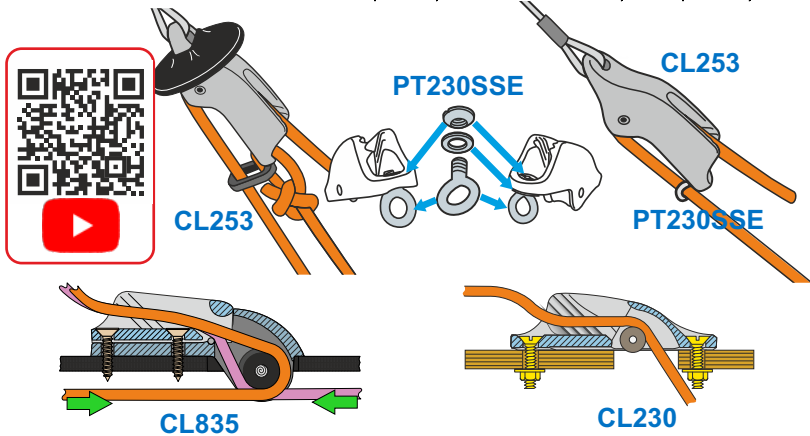



Q-Lok			mm Inch			
	mm Ø Inch Ø	A B C		mm Ø Inch Ø	mm Ø Gauge Ø	Gms Ozs
Q-Lok CL5001 (Stainless Steel)	3 - 4 1/8-5/32	33 1 5/16 - - 20 3/4		- -	- -	5 0.2

Cub & Sail Line Cleats			mm Inch			
	mm Ø Inch Ø	A B C		mm Ø Inch Ø	mm Ø Gauge Ø	Gms Ozs
Cub Cleat CL232	3 - 6 1/8-1/4	46 1 13/16 35 1 3/8 46 1 13/16		M4 #8	4.2 No8	13 0.5
CL232W (Nylon)	3 - 6 1/8-1/4	46 1 13/16 35 1 3/8 46 1 13/16		M4 #8	4.2 No8	13 0.5
Racing Sail Line Cleat (Port) CL241	3 - 6 1/8-1/4	70 2 3/4 49 1 15/16 21 1 3/16		M4 #8	4.2 No8	16 0.6
CL241AN (Aluminium)	3 - 6 1/8-1/4	70 2 3/4 49 1 15/16 21 1 3/16		M4 #8	4.2 No8	16 0.6
Racing Sail Line Cleat (Starboard) CL273	3 - 6 1/8-1/4	70 2 3/4 49 1 15/16 21 1 3/16		M4 #8	4.2 No8	16 0.6
CL273AN (Aluminium)	3 - 6 1/8-1/4	70 2 3/4 49 1 15/16 21 1 3/16		M4 #8	4.2 No8	16 0.6
Sail Cleat (Port) CL281 (Nylon)	3 - 6 1/8-1/4	70 2 3/4 49 1 15/16 21 1 3/16		M4 #8	4.2 No8	9 0.3
CL281W (Nylon)	3 - 6 1/8-1/4	70 2 3/4 49 1 15/16 21 1 3/16		M4 #8	4.2 No8	9 0.3
Sail Cleat (Starboard) CL283 (Nylon)	3 - 6 1/8-1/4	70 2 3/4 49 1 15/16 21 1 3/16		M4 #8	4.2 No8	9 0.3
CL283W (Nylon)	3 - 6 1/8-1/4	70 2 3/4 49 1 15/16 21 1 3/16		M4 #8	4.2 No8	9 0.3



Omega Cleat			mm Inch			
	mm Ø Inch Ø	A B C		mm Ø Inch Ø	mm Ø Gauge Ø	Gms Ozs
Omega Cleat CL255	3 - 6 1/8-1/4	46 1 13/16 27 1 1/16 43 1 11/16		M4 #8	4.2 No8	28 1
CL255AN (Aluminium)	3 - 6 1/8-1/4	46 1 13/16 27 1 1/16 43 1 11/16		M4 #8	4.2 No8	28 1






Rope runs free
Keeper is closed to stop rope going into cleat teeth.




Pull rope back and down to cleat
Keeper opens to allow rope into teeth



Rope gripped
Keeper holds rope in cleat



Lift up to release
Keeper opens to allow rope out of teeth



Rope runs free again.




Fairlead Cleats for Ropes to 4mm (5/32")	mm Ø Inch Ø	A	B	C	mm Ø Inch Ø	mm Ø Gauge Ø	Gms Ozs
Micros							
CL263	1 - 4	44	24	13	M3	3	4.8
CL263W (Nylon)	3/64-5/32	1 3/4	1 5/16	1/2	#4	No4	0.2
Racing Micros							
CL268	1 - 4	44	24	13	M3	3	13
CL268AN (Aluminium)	3/64-5/32	1 3/4	1 5/16	1/2	#4	No4	0.5
Racing Micros with Becket							
CL270	1 - 4	44	24	13	M3	3	14
CL270AN (Aluminium)	3/64-5/32	1 3/4	1 5/16	1/2	#4	No4	0.5
Racing Micros Side Entry (Starboard) with Becket CL277							
CL277AN (Aluminium)	1 - 4	44	24	14	M3	3	12
	3/64-5/32	1 3/4	1 5/16	1/2	#4	No4	0.4
Racing Micros Side Entry (Port) with Becket CL278							
CL278AN (Aluminium)	1 - 4	44	24	14	M3	3	12
	3/64-5/32	1 3/4	1 5/16	1/2	#4	No4	0.4
Tapered Pad for all Micros Cleats							
CL823 (Polypropylene)	-	47	-	19	-	-	4
		1 13/16	-	3/4	-	-	0.15

Fairlead Cleats for Ropes to 6mm (1/4")	mm Ø Inch Ø	A	B	C	mm Ø Inch Ø	mm Ø Gauge Ø	Gms Ozs
Racing Junior MK2							
CL211MK2	3 - 6	55	27	16	M4	4.2	23
CL211MK2AN (Aluminium)	1/8-1/4	2 1/8	1 1/16	5/8	#8	No8	0.8
Racing Junior with Becket							
CL211MK2/S2	3 - 6	55	27	16	M4	4.2	23
CL211MK2AN/S2 (Aluminium)	1/8-1/4	2 1/8	1 1/16	5/8	#4	No4	0.5
MK2 Nylon Junior							
CL272	3 - 6	55	27	16	M4	4.2	10
CL272W	1/8-1/4	2 1/8	1 1/16	5/8	#4	No4	0.5

CKC Cleats & Accessories CL815, CL817 & CL819	mm Ø Inch Ø	mm Ø Inch Ø	mm Ø Gauge Ø	Gms Ozs
Keeper CL815 (Acetal)				
For CL211MK2, CL211MK2AN, CL211MK2/S2 & CL211MK2AN/S2	4	M4	4.2	9
	5/32	#8	No8	0.3
Cage CL817 (Nylon & Stainless steel)				
For CL211MK2, CL211MK2AN	4	M4	-	23
Requires CL815 Keeper	5/32	#8	-	0.8
Tapered Pad CL819 (Polypropylene)				
for CL211MK2, CL217MK2, CL218MK2 & CL211MK2/S2	4	M4	4.2	8
	5/32	#8	No8	0.3
CKC Cleat CL211MK2 x2				
CL825CKC	5	M5	4.8	150
CL825CKCAN	5/32	#10	No10	5.3
CKC Cleat CL211MK2				
CL830CKC	4	M4	4.2	62
CL830CKCAN	5/32	#8	No8	2.2
CKC Cleat CL211MK2				
CL832CKC	4	M4	4.2	51
CL832CKCAN	5/32	#8	No8	1.8


Accessories CL814, CL816 & CL818

	mm Ø Inch Ø	mm Ø Inch Ø	mm Ø Gauge Ø	Gms Ozs
CL814 Keeper (Acetal) for CL203, CL211Mk1, CL211Mk1AN, CL217Mk1, CL218Mk1, CL236 & CL236AN	4.8 3/16	M5 #10	4.8 No.10	11 0.4
CL816 Cage (Nylon & Stainless Steel) for CL203, CL203/S1, CL211Mk1, CL211Mk1AN, CL236 & AN Requires CL814	- -	- -	- -	30 1.1
CL818 Tapered Pad (Polypropylene) for CL203, CL211Mk1, CL211Mk1AN, CL217Mk1 CL218Mk1, CL236 & AN, CL704 & CL704AN	4.8 3/16	M5 #10	4.8 No.10	14 0.5
CK Cleat CL211Mk1+CL814+CL816 CL833CKC CL833CKCAN	4.8 3/16	M5 #10	4.8 No.10	76 2.7

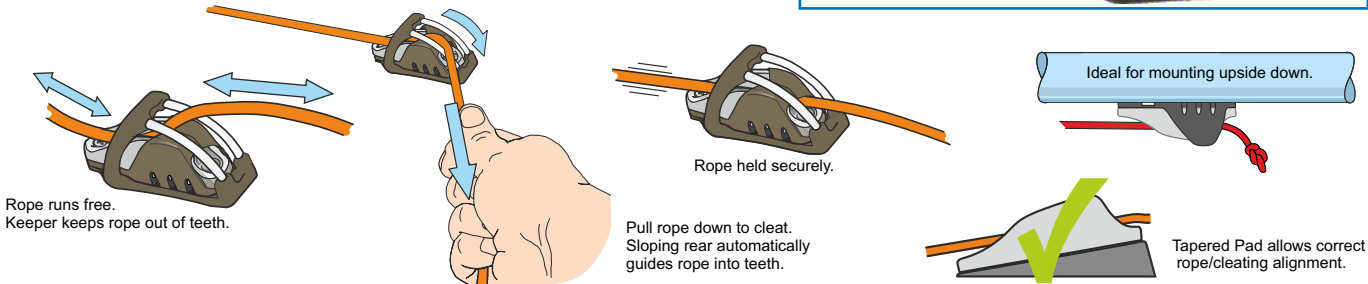

Fairlead Cleats for ropes to 6mm (1/4")

	mm Ø Inch Ø	A	B	C	mm Ø Inch Ø	mm Ø Gauge Ø	Gms Ozs
Junior CL203 (Nylon)	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 1 1/16	M4 #8	4.2 No8	17 0.6
Racing Junior Mk1 CL211Mk1 CL211Mk1AN (Aluminium)	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 1 1/16	M5 #10	4.8 No10	34 1.2
Boom Cleat CL702 CL702AN (Aluminium)	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 1 1/16	M5 #10	4.8 No10	36 1.3
Boom Cleat with Becket CL704 CL704AN (Aluminium)	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 1 1/16	M5 #10	4.8 No10	34 1.2

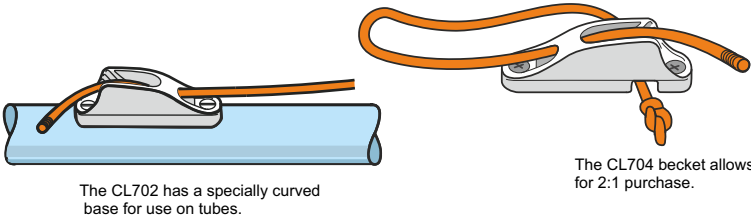

Side Entry Cleats Mk1 for Ropes to 6mm (1/4")

	mm Ø Inch Ø	A	B	C	mm Ø Inch Ø	mm Ø Gauge Ø	Gms Ozs
Side Entry (Starboard) CL217Mk1 CL217Mk1AN (Aluminium)	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 1 1/16	M5 #10	4.8 No10	32 1.2
Side Entry (Port) CL218Mk1 CL218Mk1AN (Aluminium)	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 1 1/16	M5 #10	4.8 No10	32 1.2




Using side entry cleats correctly.




Side Entry Cleats Mk2 for Ropes to 6mm (1/4")

	mm Ø Inch Ø	A	B	C	mm Ø Inch Ø	mm Ø Gauge Ø	Gms Ozs
Side Entry (Starboard) CL217Mk2 CL217Mk2AN (Aluminium)	3 - 6 1/8-1/4	55 2 1/8	27 1 1/16	17 1 1/16	M4 #8	4.2 No8	24 0.8
Side Entry (Port) CL218Mk2 CL218Mk2AN (Aluminium)	3 - 6 1/8-1/4	55 2 1/8	27 1 1/16	17 1 1/16	M4 #8	4.2 No8	24 0.8

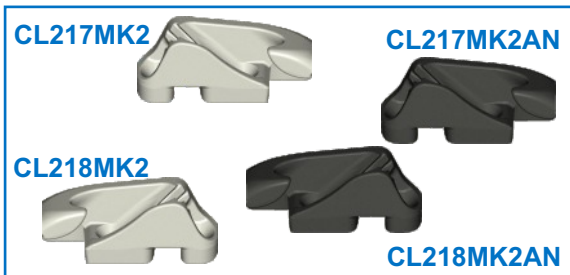

PERFORMANCE ROPE HOLDING



Cleats for Rigging on a Rope	 mm Ø Inch Ø	 A B C mm Inch	 Gms Ozs
Loop Cleat			
CL223	3 - 6	53	18
CL223W (Nylon)	1/8 - 1/4	2 1/16	0.7
Racing Junior Mk1 with Roller			
CL230	3 - 6	82	35
CL230AN (Aluminium)	1/8 - 1/4	3 1/4 2 5/8 1 1/16	1.2
Fender/Large Loop Cleat			
CL234	6 - 11	78	45
CL234W (Nylon)	1/4 - 7/16	3 1/16	1.6
Trapeze and Vang Cleat			
CL253	4 - 8	90	46
CL253AN (Aluminium)	5/32 - 5/16	3 9/16 2 13/16 1 1/16	1.6
Cobra Cleat			
CL264	4 - 6	117	47
CL264AN (Aluminium)	5/32 - 1/4	4 5/8	1.7
Micros Tie-down Cleat			
CL282 (Polypropylene)	1 - 3	37	5
	5/32	1 3/4	0.1
Jiffy Tie			
CL806 (Polypropylene)	4	42	4
	5/32	1 3/4	0.1
Handle for CL253 Trapeze Cleat			
CL834 (polypropylene)	-	-	6.5
	-	-	0.23
Eye for CL230 & CL253			
PT230SSE (Stainless Steel)	-	-	3.3
	-	6 1/4 12 1/2	0.12
Mast Guyline Tensioning Reel			
PT300771	6	303	245
	1/4	12	8.5



Line-lok® Cleats for Rigging on a Rope

Line-lok®					
CL260, CL260W, CL260NG, CL260K & CL260G (Nylon)	2 - 5 1/16-3/16	31 1 1/4	- -	10 3/8	2.2 0.08
Mini Line-lok®					
CL266, CL266W, CL266NG, CL266K & CL266G (Nylon)	1 - 3 3/64-1/8	21.3 27/32	- -	7 5/32	0.74 0.03
Large Line-lok®					
CL271, CL271W, CL271NG, CL271K & CL271G (Nylon)	4 - 8 5/32	67 2 5/8	- -	23 7/8	28 0.98
Medium Line-lok®					
CL276, CL276W, CL276NG, CL276K & CL276G (Nylon)	3 - 6 1/8-1/4	47 1 7/8	- -	17 1 1/16	9.6 0.34



6 colours

White








Nato
Green

Light
Grey

Black

Glow in
the dark

Khaki

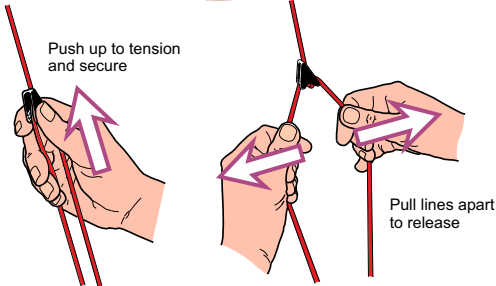



PERFORMANCE ROPE HOLDING

Aero Cleats CL826

Aero Base + CL211Mk2

Racing Junior

CL826-11 (Nylon & Aluminium)

Aero Base + CL211Mk2AN

Hard Anodised Racing Junior

CL826-11AN (Nylon & Aluminium)

Aero Base + CL272Mk2

Nylon Junior

CL826-72 (Nylon)

All Aluminium Aero Cleat

Based on CL211Mk2 Hard Anodised

CL285 (All Aluminium)

Aero Cleats CL827

Aero Base + CL203

Nylon Junior

CL827-03 (Nylon)

Aero Base + CL211Mk1

Racing Junior

CL827-11 (Nylon & Aluminium)

Aero Base + CL211Mk1

Hard Anodised Racing Junior

CL827-11AN (Nylon & Aluminium)

Aero Base + CL217Mk1

Side Entry Racing Junior (Starboard)

CL827-17 (Nylon & Aluminium)

Aero base + CL217Mk1 Hard Anodised

Side Entry Racing Junior (Starboard)

CL827-17AN (Nylon & Aluminium)

Aero Base + CL218Mk1

Side Entry Racing Junior (Port)

CL827-18 (Nylon & Aluminium)

Aero Base + CL218Mk1 Hard Anodised

Side Entry Racing Junior (Port)

CL827-18AN (Nylon & Aluminium)

Aero Base + CL236

Roller Fairlead Racing Junior

CL827-36 (Nylon & Aluminium)

Aero Base + CL236 Hard Anodised

Roller Fairlead Racing Junior

CL827-36AN (Nylon & Aluminium)

Aero Cleats CL828

Aero base + CL263

Nylon Micros

CL828-63 (Nylon)

Aero Base + CL268

Racing Micros

CL828-68 (Nylon & Aluminium)

Aero base + CL268

Hard Anodised Racing Micros

CL828-68AN (Nylon & Aluminium)

Aero base + CL270

Racing Micros with Becket

CL828-70 (Nylon & Aluminium)

Aero base + CL270 Hard Anodised

Racing Micros with Becket

CL828-70AN (Nylon & Aluminium)

Aero base + CL277

Side Entry Racing Micros (Starboard)

CL828-77 (Nylon & Aluminium)

Aero base + CL277 Hard Anodised

Side Entry Racing Micros (Starboard)

CL828-77AN (Nylon & Aluminium)

mm Ø Inch Ø	A	B	C	mm Inch	Gms Ozs
----------------	---	---	---	------------	------------


4 - 6 5/32-1/4	73 27/8	- -	16 5/8		35 1.2
4 - 6 5/32-1/4	73 27/8	- -	16 5/8		35 1.2
4 - 6 5/32-1/4	73 27/8	- -	16 5/8		35 0.8
5 - 6 3/16-1/4	67 25/8	- -	15 5/8		34 1.2



mm Ø Inch Ø	A	B	C	mm Inch	Gms Ozs
----------------	---	---	---	------------	------------

4 - 6 5/32-1/4	112 4 3/8	- -	19 3/4		43 1.5
4 - 6 5/32-1/4	112 4 3/8	- -	19 3/4		62 2.2
4 - 6 5/32-1/4	112 4 3/8	- -	19 3/4		62 2.2
4 - 6 5/32-1/4	112 4 3/8	- -	19 3/4		59 2.1
4 - 6 5/32-1/4	112 4 3/8	- -	19 3/4		59 2.1
4 - 6 5/32-1/4	112 4 3/8	- -	19 3/4		59 2.1
4 - 6 5/32-1/4	112 4 3/8	- -	19 3/4		69 2.4
4 - 6 5/32-1/4	112 4 3/8	- -	19 3/4		69 2.4

mm Ø Inch Ø	A	B	C	mm Inch	Gms Ozs
----------------	---	---	---	------------	------------

3 - 4 1/8-5/32	60 2 3/8	- -	13 1/2		15 0.5
3 - 4 1/8-5/32	60 2 3/8	- -	13 1/2		21 0.75
3 - 4 1/8-5/32	60 2 3/8	- -	13 1/2		21 0.75
3 - 4 1/8-5/32	60 2 3/8	- -	13 1/2		24 0.85
3 - 4 1/8-5/32	60 2 3/8	- -	13 1/2		24 0.85
3 - 4 1/8-5/32	60 2 3/8	- -	13 1/2		23 0.8
3 - 4 1/8-5/32	60 2 3/8	- -	13 1/2		23 0.8

Sail Cleats						
	mm Ø Inch Ø	A	B	C	mm Ø Inch Ø	Gms Ozs
Leech Line Cleat CL212 (Nylon)	2 - 5 1/16-3/16	70 2 3/4	49 1 15/16	21 1 3/16	4 5/32	9 0.3
Shield for CL212 CL212A (Nylon)	-	71 2 3/4	49 1 15/16	29 1 1/8	4 5/32	4 0.1
Backplate for CL212 CL212BP (Nylon)	-	70 2 3/4	49 1 15/16	21 1 3/16	-	2 0.08
Backplate Black for CL241AN, CL258AN, CL259AN & CL273AN CL212BP-B (Nylon)	-	70 2 3/4	49 1 15/16	21 1 3/16	-	2 0.08
Fine Line Cleat (Starboard) CL214W (Nylon)	2 - 5 1/16-3/16	70 2 3/4	49 1 15/16	21 1 3/16	4 5/32	9 0.3
Dinghy Leech Line Cleat CL221 (Nylon)	0 - 3 0-1/8	43 1 3/4	33 1 3/16	17 1 1/16	3 1/8	4 0.1
Sail Line Cleat CL233 (Nylon)	2 - 6 1/16-1/4	57 2 1/4	-	34 1 5/16	-	8 0.3
Backplate CL233BP (Nylon) for CL233	-	57 2 1/4	-	34 1 5/16	-	2 0.08
Racing Sail Line Cleat (Port) CL241 CL241AN (Aluminium)	3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 1 3/16	4 5/32	16 0.6
Racing Fine Line (Starboard) CL258 CL258AN (Aluminium)	3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 1 3/16	4 5/32	19 0.7
Racing Fine Line (Port) CL259 CL259AN (Aluminium)	3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 1 3/16	4 5/32	19 0.7
Sail Edge Cleat CL267 (Nylon + Aluminium)	2 - 4 1/16-5/32	50 2	-	37 1 7/16	4 5/32	12 0.42
Sail Edge Cleat CL269 (Nylon)	2 - 4 1/16-5/32	50 2	-	37 1 7/16	4 5/32	10 0.35
Racing Sail Line Cleat (Starboard) CL273 CL273AN (Aluminium)	3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 1 3/16	4 5/32	16 0.6
Sail Cleat (Port) CL281 (Nylon) CL281W (Nylon)	3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 1 3/16	4 5/32	9 0.3
Sail Cleat (Starboard) CL283 (Nylon) CL283W (Nylon)	3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 1 3/16	4 5/32	9 0.3

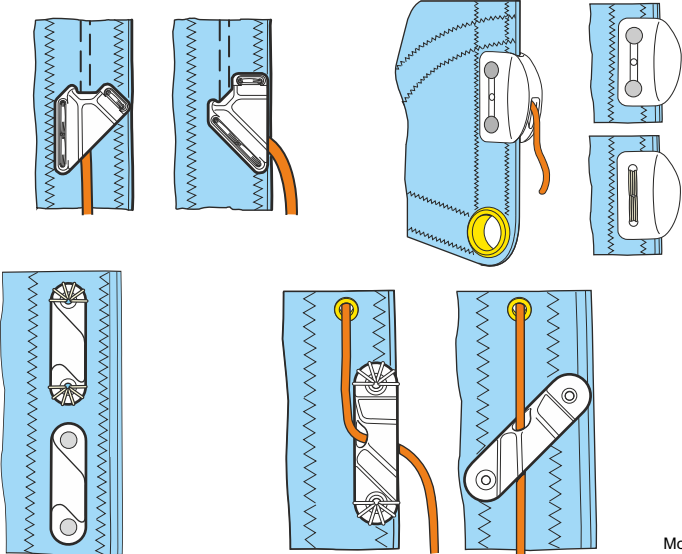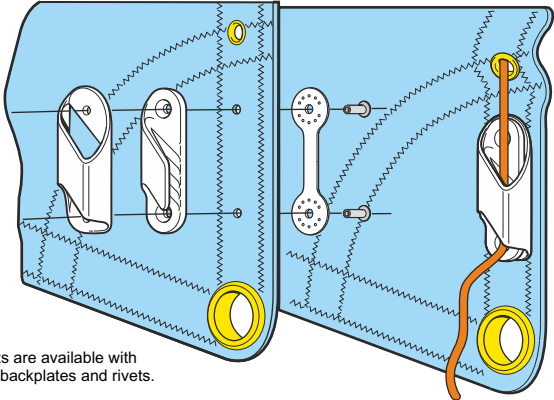

Most cleats can be sewn or riveted.

More cleats are available with or without backplates and rivets.



PERFORMANCE ROPE HOLDING

Kitesurfing

Titanium Thimbles

Power Grip



PT5107



PT5110




Kitesurfing Cleats	 mm Ø Inch Ø	mm Inch			 Gms Ozs
		A	B	C	
Racing Junior Mk2 CL211Mk2AN (Aluminium)	3 - 6 1/8-1/4	55 2 1/8	27 1 1/16	17 5/8	23 0.8
Trapeze and Vang Cleat CL253 (Aluminium) CL253AN (Nylon & Aluminium)	4 - 8 5/32-5/16	90 3 9/16	72 2 13/16	18 11/16	46 1.6
Cobra Cleat CL264 (Aluminium) CL264AN (Aluminium)	4 - 6 5/32-1/4	120 4 23/32	- -	23 29/32	47 1.7
Racing Micros CL268AN (Aluminium)	1 - 4 3/64-5/32	44 1 3/4	24 15/16	13 1/2	13 0.5
All Aluminium Aero Cleat Based on CL211Mk2 Hard Anodised CL285 (All Aluminium)	5 - 6 3/16-1/4	67 2 5/8	- -	15 5/8	34 1.2
Aero base + CL211Mk2AN Hard Anodised Racing Junior CL826-11AN (Nylon & Aluminium)	4 - 6 5/32-1/4	73 2 7/8	- -	16 5/8	35 1.2
Aero base + CL268AN Hard Anodised Racing Junior CL828-68AN (Nylon & Aluminium)	3 - 4 1/8-5/32	60 2 3/8	- -	13 1/2	21 0.75
Aero base + CL211Mk2AN Racing Junior CL829-11AN (Nylon & Aluminium)	4 - 6 5/32-1/4	78 3 1/16	- -	16 5/8	46 1.6
Screw-on Stopper Ball PT524 (Nylon)	6 1/4	20 13/16	- -	20 13/16	12 0.4
Screw-on Stopper Ball PT525 (Nylon)	8 - 9 5/16-3/8	20 13/16	- -	20 13/16	12 0.4
Y Splitter PT428 (Aluminium)	- -	47 1 27/32	- -	18 23/32	20 0.7


Titanium Thimbles	 mm Ø Inch Ø	mm Inch			 Kg S. W. L.	 Gms Ozs
		A	B	C		
Size 1 (3-4mm) PT5107	3 - 4 1/8-5/32	16 5/8	7 5/32	6 1/4	400	2 0.07
Size 2 (5-6mm) PT5110	5 - 6 3/16-1/4	23 29/32	10 25/64	8 5/16	800	4.5 0.16


Power Grip Cleats	 mm Ø Inch Ø	mm Inch			 Gms Ozs
		A	B	C	
Tug Cleat CL249 (Aluminium)	3 - 6 1/8-1/4	92 3 9/16	- -	17 11/16	52 1.9
Power Grip 1 CL261 (Aluminium)	3 - 6 1/8-1/4	95 3 3/4	- -	17 11/16	52 1.9
Power Grip 2 CL262 (Aluminium)	3 - 6 1/8-1/4	189 7 7/16	- -	17 11/16	70 2.5


The CL249 & CL261 is for single handed use, allowing you to pull twice the load.



The CL262 is for 2 handed use, allowing you to increase the pull load.

Windsurfing Cleats			mm Inch		
	mm Ø Inch Ø	A B C		mm Ø Inch Ø	Gms Ozs
Compact Twin Sheave Cleat CL247 (Aluminium)	3 - 6 1/8-3/16	53 31 40 2 1/16 1 1/4 1 9/16		M5 #10	40 1.4
Cleat with Hook and 2 Sheaves CL248 (Aluminium)	3 - 5 1/8-3/16	69 - 1 1/16 2 3/4 - 1 9/16		- -	52 1.8
The Gap Closer CL250 (Aluminium)	3 - 5 1/8-3/16	84 11+29 3 1/4 7/16+1 1/8 1 7/8		M5 #10	43 1.6
Trapeze and Vang Cleat CL253 (Aluminium)	4 - 8 5/32-5/16	89 70 18 3 1/2 2 3/4 1 1/16		- -	46 1.6
Rivet-on Fitting for 6:1 Ratio CL708 (Aluminium)	3 - 5 1/8-3/16	83 11+29 37 3 1/4 7/16+1 1/8 1 7/16		M5 #10	32 1.1
Boom Cleat and Clamp CL244 (Aluminium & Nylon)	3 - 6 1/8-1/4	58 - - 2 1/4 - -		- -	32 1.1
Eye for CL230 & CL253 PT230SSE (Stainless Steel)	-	- 6 12 - 1/4 1/2		- -	- -

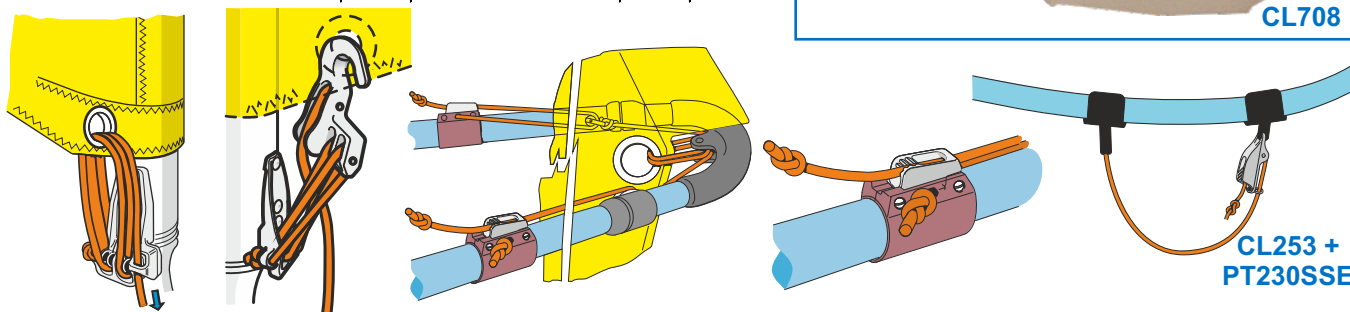

Insert Cleats			mm Inch	
	mm Ø Inch Ø	A B C		Gms Ozs
Insert Cleat with Fairlead CL243/L (Nylon)	3 - 6 1/8-1/4	42 - 22 1 21/32 - 7/8		10 0.4
Insert Cleat with Fairlead CL244/L (Aluminium)	3 - 5 1/8-3/16	42 - 22 1 21/32 - 7/8		18 0.6
Twin Insert Cleat CL710 (Aluminium)	3 - 6 1/8-1/4	48 - 13 1 7/8 - 1/2		18 0.6
Small Insert Cleat CL712 (Aluminium)	3 - 5 1/8-3/16	28 - 11 1 1/8 - 7/16		7 0.2
Insert Cleat CL715 (Aluminium)	3 - 5 1/8-3/16	9 - 12 3/8 - 7/16		3 0.1
Very Small Insert Cleat CL716 (Aluminium)	3 - 4 1/8-5/32	24 - 11 1 5/16 - 7/16		4 0.11




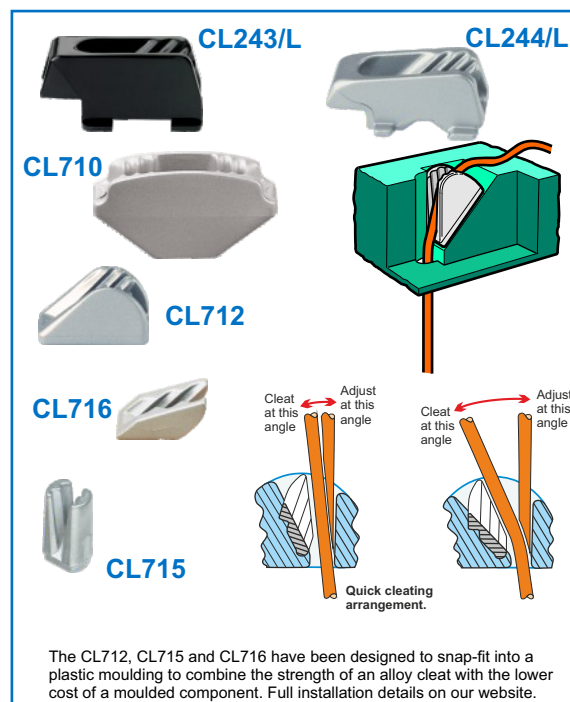



Image courtesy of North Windsurfing


Cleats for Ropes to 12mm (½")							
	mm Ø Inch Ø	A	B	C	mm Ø Inch Ø	mm Ø Gauge Ø	Gms Ozs
Vertical CL201 (Nylon)	6 - 12 ¼ - ½	95 3¾	72 2 ¹³ / ₁₆	28 1 ¹ / ₈	M6 ¼	6 No14	43 1.5
Racing Vertical CL219 & CL219AN (Aluminium)	6 - 12 ¼ - ½	90 3 ⁹ / ₁₆	72 2 ¹³ / ₁₆	27 1 ¹ / ₁₆	M6 ¼	6.3 No14	70 2.5
Uncoated Racing Vertical CL219VB (Aluminium)	6 - 12 ¼ - ½	90 3 ⁹ / ₁₆	72 2 ¹³ / ₁₆	27 1 ¹ / ₁₆	M6 ¼	6.3 No14	70 2.5
Vertical with Integral Fairlead CL228 (Nylon)	6 - 12 ¼ - ½	114 4½	72 2 ¹³ / ₁₆	30 1 ³ / ₁₆	M6 ¼	6.3 No14	68 2.4
Side-fixing Vertical CL280HEX (Nylon) & CL280CSK (Nylon)	6 - 12 ¼ - ½	60 2 ³ / ₈	45 1¾	61 2 ¹³ / ₃₂	M6 ¼	6.3 No14	45 1.58
Tapered Pad for CL201, CL219, CL219AN, CL237 & CL238		103 4 ¹ / ₁₆	-	34	M6	6.3	18
CL804 (Polypropylene)	-	4 ¹ / ₁₆	-	1 ³ / ₈	¼	No14	0.6

Bollards for Ropes to 16mm (5/8")							
	mm Ø Inch Ø	A	B	C	mm Ø Inch Ø	mm Ø Gauge Ø	Gms Ozs
Clam-Bollard CL208 (Nylon)	6 - 10 1/4 - 3/8	85 ^Ø 3 3/8	65 2 1/16	-	M6 1/4	6.3 No14	67 2.4
Clam-Bollard Major CL210 (Nylon)	10 - 16 3/8 - 5/8	99 ^Ø 3 3/8	76 3	-	M8 5/16	8 No16	141 5.0




Spring-gate Cleats for ropes to 12mm (1/2")							
	mm Ø Inch Ø	A	B	C	mm Ø Inch Ø	mm Ø Gauge Ø	Gms Ozs
Vertical with Spring-gate CL237 (Nylon)	6 - 12 1/4 - 1/2	95 3 3/4	72 2 13/16	40 1 5/8	M6 1/4	6.3 No14	47 1.7
Racing Vertical with Spring-gate CL238	6 - 12 1/4 - 1/2	90 3 3/8	72 2 13/16	40 1 5/8	M6 1/4	6.3 No14	75 2.6



Spring-gate Cleats for ropes to 16mm (5/8")							
	mm Ø Inch Ø	A	B	C	mm Ø Inch Ø	mm Ø Gauge Ø	Gms Ozs
Major with Spring-gate CL239 (Nylon)	10 - 16 3/8 - 5/8	122 4 13/16	95 3 3/4	49 2	M8 5/16	6.3 No14	88 3.2
Racing Major with Spring-gate CL240	12 - 16 1/2 - 5/8	118 4 3/8	95 3 3/4	50 2	M8 5/16	6.3 No14	166 5.9



Cleats for Ropes to 16mm (5/8")							
	mm Ø Inch Ø	A	B	C	mm Ø Inch Ø	mm Ø Gauge Ø	Gms Ozs
Major CL205 (Nylon)	10 - 16 3/8 - 5/8	122 4 13/16	95 3 3/4	36 1 1/16	M8 5/16	6.3 No14	85 3.0
Racing Major CL220 (Aluminium)	12 - 16 1/2 - 5/8	118 4 3/8	95 3 3/4	37 1 1/2	M8 5/16	6.3 No14	163 5.7
Uncoated Racing Major CL220 (Aluminium)	12 - 16 1/2 - 5/8	118 4 3/8	95 3 3/4	37 1 1/2	M8 5/16	6.3 No14	163 5.7
Fairlead for CL205, CL220, CL239 & CL240 - CL2245 (Stainless Steel)	-	50 1 3/32	-	41 1 5/8	M8 5/16	6.3 No14	72 2.5
Tapered Pad CL805 (Polypropylene)	-	131 5 1/8	-	45 1 3/4	M8 5/16	6.3 No14	35 1.2





PERFORMANCE ROPE HOLDING

Shock cord Products




Shockcord Products for Ropes to 8mm (5/16")	mm Ø Inch Ø	A mm Inch	B mm Inch	C mm Inch	mm Ø Inch Ø	mm Ø Gauge Ø	Gms Ozs
Rigid Inflatable Boat Hook PT401 & PT401W (Acetal)	3 - 6 1/8-1/4	39 1 1/2	- -	38 1 1/2	- -	- -	9 0.3
Shockcord Ball PT520 & PT520W (Polypropylene)	5 - 7 3/16-9/32	19 3/4	- -	21 13/16	- -	- -	4 0.1
T-Bar for shockcord PT403 (High density Polyethylene)	4 - 6 5/32-1/4	43 1 11/16	- -	10 12/32	- -	- -	1.2 0.04
Hook for shockcord PT404 (High density Polyethylene)	5 - 7 3/16-9/32	50 1 31/32	- -	23 29/32	- -	- -	4 0.15
Hook Connector for shockcord PT405 & PT405W (Nylon)	4 - 8 5/32-5/16	57 2 1/4	- -	25 1	- -	- -	8.2 0.29

Stopper Ball




Stopper Balls	mm Ø Inch Ø	A mm Inch	B mm Inch	C mm Inch	Gms Ozs
Screw-on Stopper Ball PT524 (Nylon)	6 1/4	20 13/16	- -	20 13/16	12 0.4
Screw-on Stopper Ball PT525 (Nylon)	8 - 9 5/16-3/8	20 13/16	- -	20 13/16	12 0.4

Access cover with seal

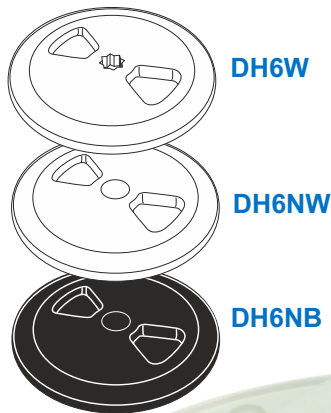


150mm Access cover with Seal	Dia mm Ø Inch Ø	Height mm Inch	Material	mm Ø Inch Ø	mm Ø Gauge Ø	No. of Fixings	Gms Ozs
Inspection Access Cover White with winch handle socket DH6W	206	12 1/2	ASA	4 No 8	4 No 8	6	280 9.9
Inspection Access Cover White with plain top DH6NW	206	12 1/2	ASA	4 No 8	4 No 8	6	280 9.9
Inspection Access Cover Black with plain top DH6NB	206	12 1/2	ASA	4 No 8	4 No 8	6	280 9.9

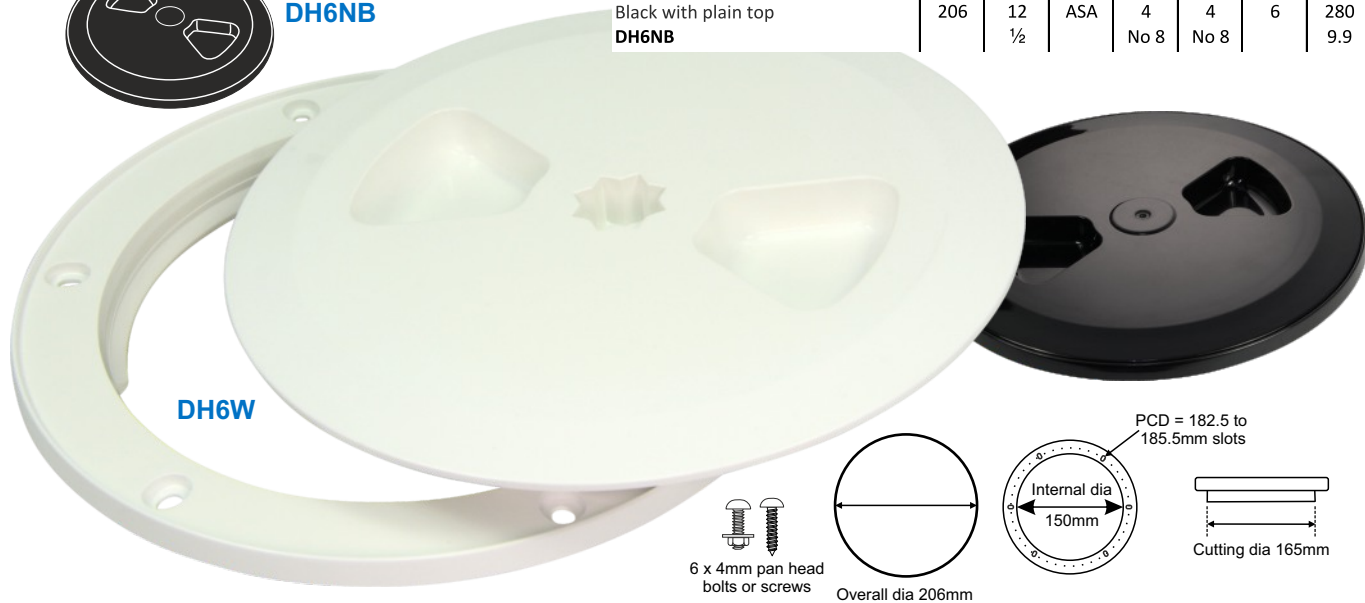

Trucker Hitch Cleat

Trucker Hitch Cleat
CL719 (Nylon)

mm Ø Inch Ø	A	B	C	mm Ø Inch Ø	mm Ø Gauge Ø	Gms Ozs
5 - 7 3/16 - 9/32	139 5 1/16	- -	28 1 1/16	- -	- -	73 2.6

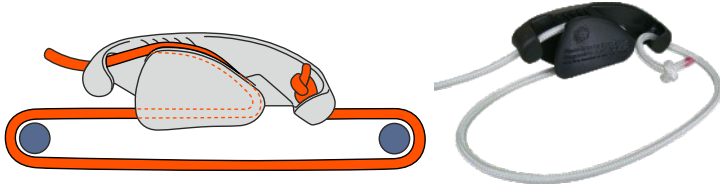


CL719



Titanium Thimbles

Size 1 (3-4mm)
PT5107

mm Ø Inch Ø	A	B	C	Kg S. W. L	Gms Ozs
3 - 4 1/8 - 5/32	16 5/8	7 5/32	6 1/4	400	2 0.07
Size 2 (5-6mm) PT5110	5 - 6 3/16 - 1/4	23 29/32	10 25/64	8 5/16	800 4.5 0.16
Size 3 (7-8mm) PT5115	7 - 8 9/32 - 5/16	34 1 1/3	15 19/32	11 7/16	1500 14 0.49
Size 4 (12-13mm) PT5120	12 - 13 1/4 - 33/64	45 1 7/8	20 4/5	18 5/7	3000 32 1.13

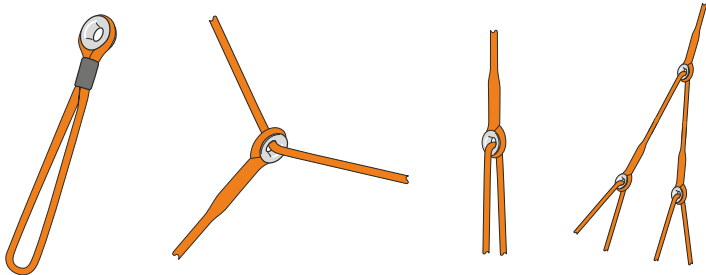

PT5107

PT5110

PT5115

PT5120



Cleats for tubes to 43mm
(1 1/16")^Ø

Cleat and Integral Clamp
CL235 (Nylon)

mm Ø Inch Ø	A	B	C	mm Ø Inch Ø	mm Ø Gauge Ø	Gms Ozs
3 - 6 1/8 - 1/4	67 2 5/8	- -	36 1 11/16	30-32 1 1/8 - 1 1/4	- -	17 0.6
Boom Cleat and Clamp CL243/S5 (Nylon)	3 - 6 1/8 - 1/4	58 2 1/4	- -	20-21 13/16	- -	28 1.0
Boom Cleat and Clamp CL244+CL105 (Aluminium & Nylon)	3 - 5 1/8 - 1/16	58 2 1/4	- -	30-32 1 1/8 - 1 1/4	- -	32 1.1
Boom Cleat and Clamp CL244+CL111 (Aluminium & Nylon)	3 - 5 1/8 - 3/16	58 2 1/4	- -	34-36 *	- -	32 1.1
Boom Cleat and Clamp CL244+CL115 (Aluminium & Nylon)	3 - 5 1/8 - 3/16	58 2 1/4	- -	35-37 1 3/8 - 1 1/2	- -	32 1.1
Boom Cleat and Clamp CL244+CL134 (Aluminium & Nylon)	3 - 5 1/8 - 3/16	58 2 1/4	- -	42-43 **	- -	32 1.1
Bar Cleat CL265	4 - 8 5/32 - 5/16	63 2 1/2	66 2 5/8	18 1 1/16	25-31 2 1/2	- 60 2.1
CL265AN (Aluminium & SS clamp)						

CL243/S5

CL235



CL244+CL111



CL244+CL134



CL244+CL105




CL244+CL115



CL265



CL243+CL072



* 1 1/32 - 1 27/64 ** 1 21/32 - 1 11/16



PERFORMANCE ROPE HOLDING

CL279



Cleat for Underground Recycling Bags


Cleat for Recycling Bag CL279 (Nylon)

mm Ø Inch Ø	A	B	C	mm Inch	Gms Ozs
10 3/8	198 7 3/4	95 3 3/4	55 2 1/16		250 9.0

PT406




PT413-1

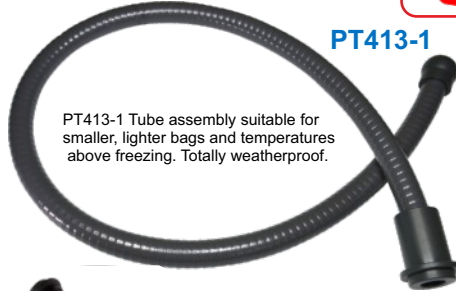

PT413-1 Tube assembly suitable for smaller, lighter bags and temperatures above freezing. Totally weatherproof.

PT416-1

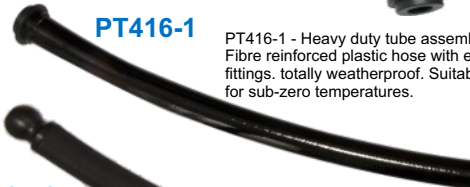

PT416-1 - Heavy duty tube assembly. Fibre reinforced plastic hose with end fittings. totally weatherproof. Suitable for sub-zero temperatures.

PT417-1

PT417-1 - Extra heavy duty tube assembly. Steel reinforced synthetic rubber hose with end fitting. Suitable for sub-zero temperatures.



PT414-9

PT414-9 - Low friction strong abrasion resistant yellow rope with spliced eye one end including protective sleeve.

PT418



Use with semi-buried recycling bags with bottom lids.

Accessories for Recycling Bags

Loop for use with CL279 Refuse Bag Cleat PT406 (Nylon)

Tube Assembly 1m long with end fittings PT413-1 (Reinforced PVC)



Tube Assembly 1m long with end fittings PT416-1 (Fibre Reinforced Plastic)

Tube Assembly 1m long with end fittings PT417-1 (Steel Reinforced Synthetic Rubber) Rope, 10mmØ X 8 Metres, eye one end PT414-9 (Polyethylene)

mm Ø Inch Ø	A	B	C	mm Inch	Gms Ozs
-	148 5 13/16	-	93 3 5/8		95 3.4
8-11 5/16-7/16	1010 40	-	-		180 6
8-11 5/16-7/16	1010 40	-	-		410 14
8-11 5/16-7/16	1010 40	-	-		910 32
6 - 10 1/4-3/8	8000 312	-	10 3/8		-



Ball end of tube and rope secured in CL279 cleat

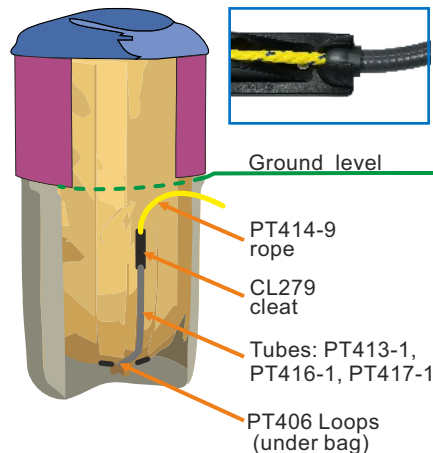


Square end of tube (& rope) attach to PT406 Loop at bottom of bag.

Clamp for Bottom Lid Recycling Bags

Cleat for Recycling Bag with Solid Lid PT418 (Nylon)

mm Ø Inch Ø	A	B	C	mm Inch	Gms Ozs
10 3/8	275 10 5/8	70+70 2 3/4+2 3/4	100 3 7/8		645 23.0

Chok-A-Blok Strap Guard for Webbing	 mm Ø Inch Ø	 A B C mm Inch	 Gms Ozs
Webbing up to 38mm CAB35 (Polypropylene)	38 1½	160 6¼ - 43 11⅙	21 0.7
Webbing up to 50mm CAB50 (Polypropylene)	50 2	178 7 - 58 2¼	35 1.22

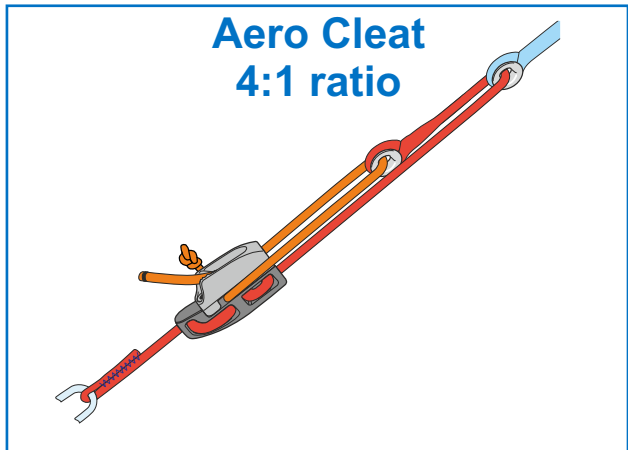
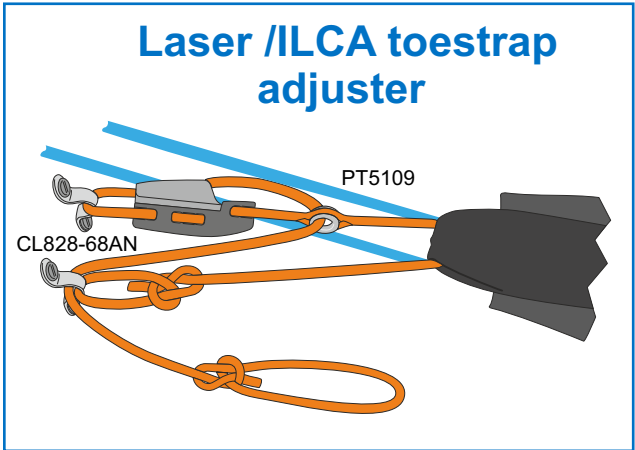
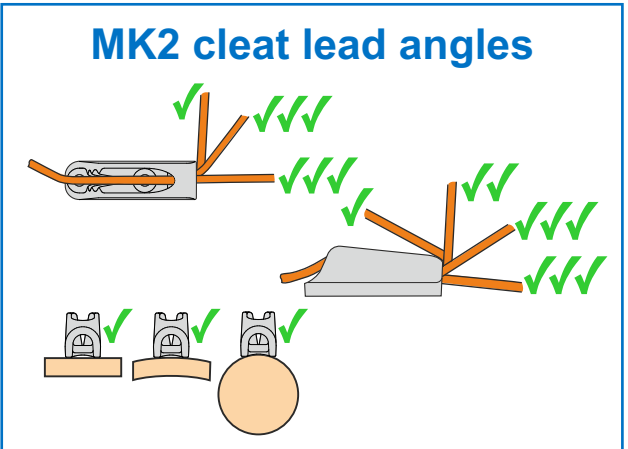
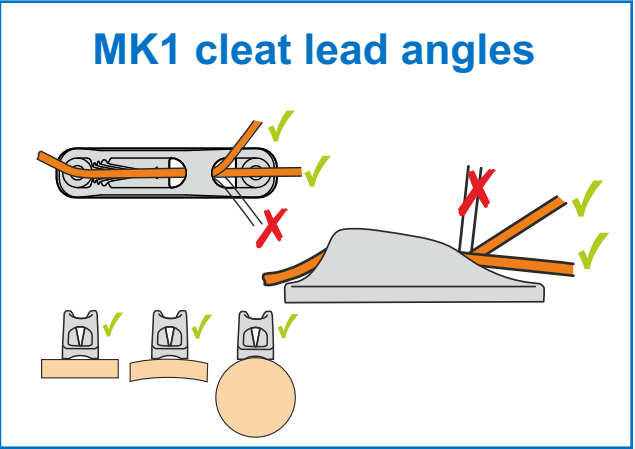
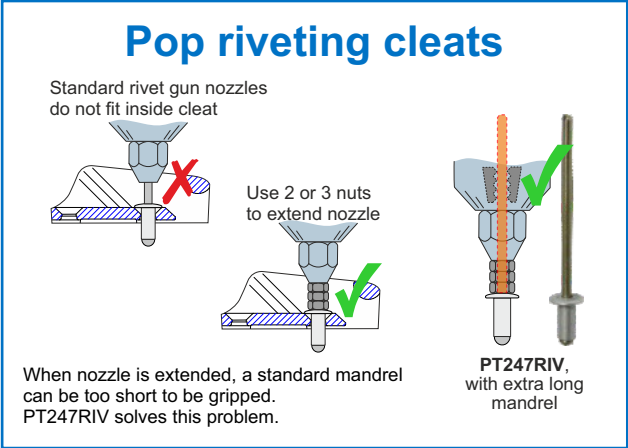
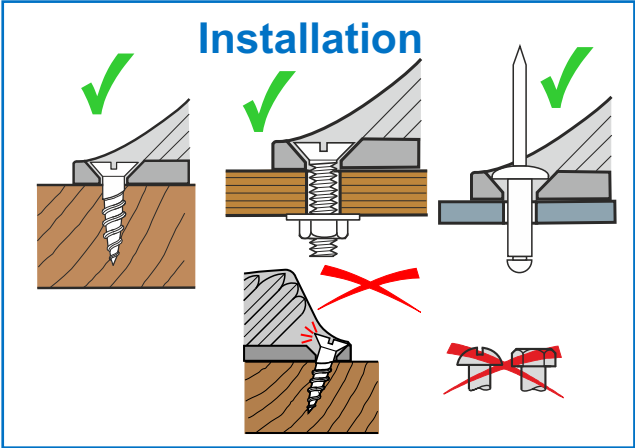





Image courtesy of Jolanda Linshooten


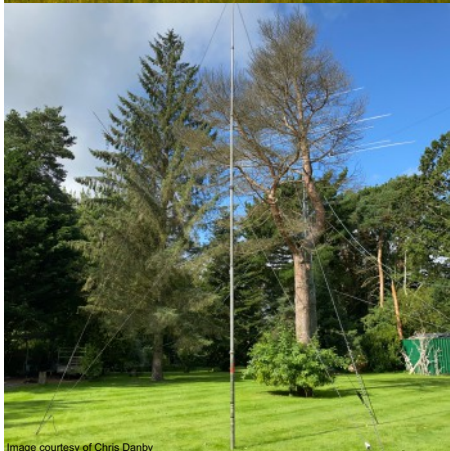


Image courtesy of Chris Danby



Clamcleat®
Rope cleats

60 years
Anniversary
1965-2025

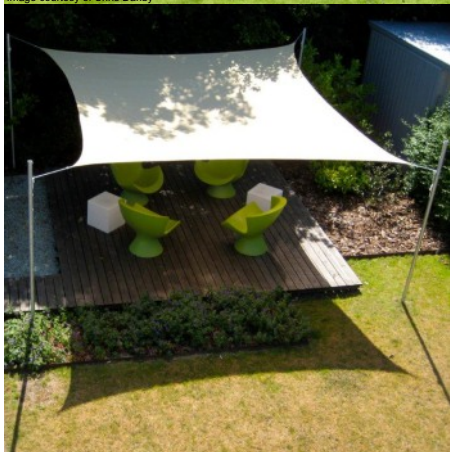

Clamcleat®
Rope cleats

Clamcleats Limited
Watchmead
Welwyn Garden City
Hertfordshire AL7 1AP
England
Telephone +44 (0) 1707 330101
email sales@clamcleat.com
www.clamcleat.com