

OSCULATI

RV
line



Details that make a difference



Magnetic door stop

When not in use, the plate automatically returns to a flat, recessed, obstacle-free position.

- AISI 316
- FLUSH
- PATENTED (UTILITY MODEL)





Magnetic door stop

- AISI 316
- FLUSH
- PATENTED (UTILITY MODEL)

Code 38.155.80

Magnetic doorstop consisting of two components: door block with 18° inclined magnet and ground block with retractable plate. The magnet lifts the plate when the door is approaching and the block is activated. When not in use, the plate automatically returns to a flat, recessed, obstacle-free position.

Equipped with shock and anti-vibration gaskets and a set of 2 gaskets (2 mm and 4 mm) to adjust the ground block height as required. For 4 to 10 mm floor height doors stops.

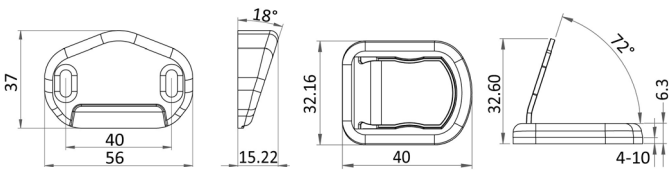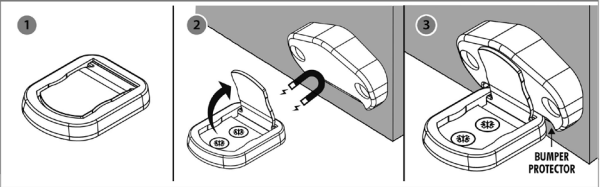

Deluxe XL pull handle

Large and ergonomic grip.
Recess-fit mounting.



Watch the video



OSCULATI - RV Line

Deluxe 2 pull latch

FLUSH



ERGONOMIC

AUTOMATIC OPEN

Code 38.511.10


Handle with wide ergonomic grip equipped with automatic pull-out system and snap lock.
For recess-fit mounting. Fitted with anti-vibration closing system.
Fixing with M4 studs, no visible screws.

OSCULATI

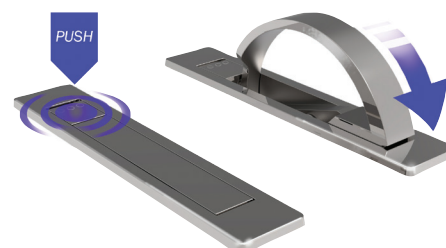

Cruiser power plug and socket

16A marine shore power.
Simple and compact design.
In compliance with the IEC 60309-5 European safety standards.

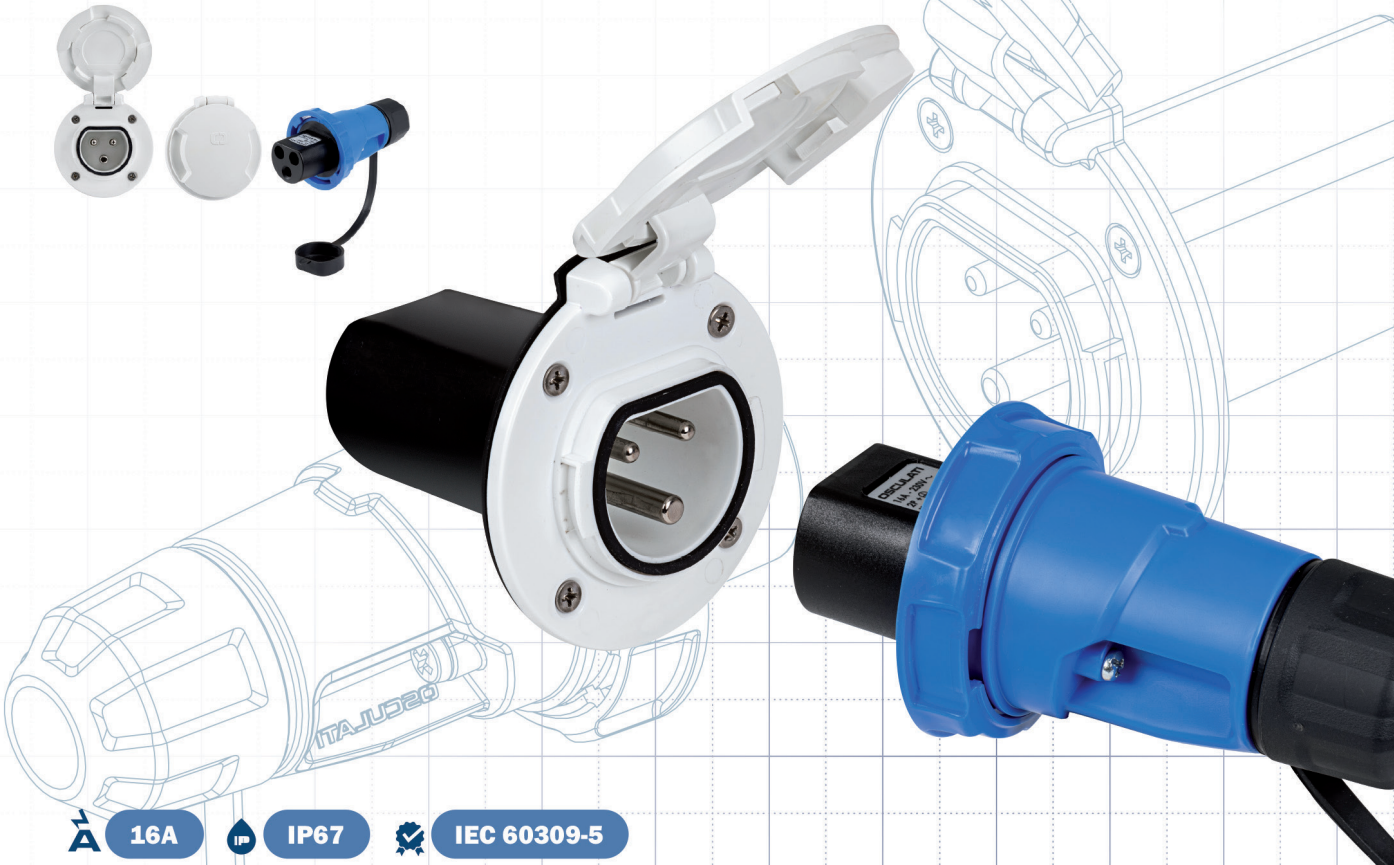

16A **IP67** **IEC 60309-5**




Cruiser 16A socket and plug

16A **IP67** **IEC 60309-5**

Marine plug and socket for 16A - 230V shore power cord.
Made of PA6, fitted with high energy efficiency contacts and IP67 cover.
Plug designed for ergonomic grip, fastened to the boat socket through a rotating bezel. IP67 watertight closure. A rubber cap ensures IP44 tightness when unplugged.
Simple and compact design for easy installation in any corner of the cockpit
In compliance with the IEC 60309-5 European safety standards.



Code	Description	Lid	Base
14.416.02	Nylon plug Pa6	-	-
14.416.01	Socket	☐ Nylon Pa6	☐ Nylon Pa6
14.416.11	Socket	☒ Stainless steel	☐ Nylon Pa6
14.416.21	Socket	☒ Stainless steel	☒ Nylon Pa6
14.416.40	Socket	☒ Nylon Pa6	☒ Nylon Pa6





Retractable electric cable

IP44 AISI 316 AUTOMATIC ROLLABLE

Innovative electrical cable dock system. Hull hidden installation.
Thanks to an automatic retractable dispenser the electrical cable is drawn from a box and directly connected to the dock pillar.
To stow the cable, just unlock the seal and wait for the retractor to automatically rewind the extracted cable.
Once the cable is stowed away, the system disappears inside the hull into an elegant mirror-polished stainless steel box that ensures IP44 airtight seal.
The alignment between the winder and the bush can be oriented in any direction with a maximum recommended angle of 80°.
Available in two versions with different cable capacities of 16A and 32A.
Internal winder supplied with adjustable mounting brackets.

Code	Description	A	Cable length m	Cable cross-section mm²	V	A mm	B mm	C mm
14.322.01	3P plug	16	15	3x2.5	230	220	400	150

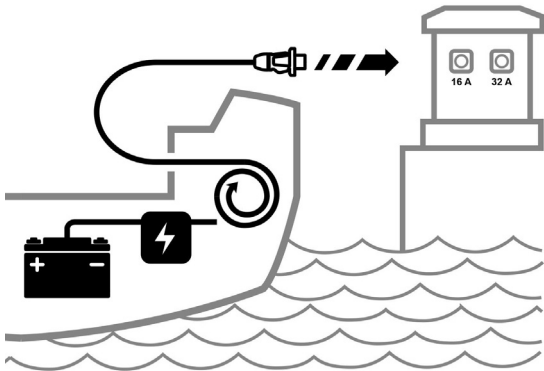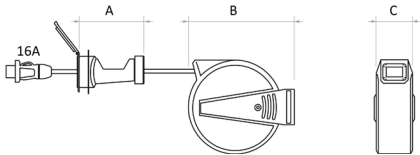

Dock cable with braid and Cruiser plug

16A ROPE FEELING

The electrical cable is sheathed in a special polyester cover for wear protection and nautical look. Equipped with a 16A Cruiser plug, boat side and a three-pole industrial plug, dock side.

Code	Length m	A	Ø outer cable mm	Cable cross-section mm²	Dockside plug
14.416.60	10	16	12.4	2.5	14.335.01
14.416.61	15	16	12.4	2.5	14.335.01



OSCULATI



Cruiser dock cable and plug

16A IP67 IEC 60309-5

Code	Length m	A	Ø outer cable mm	Cable cross-section mm²	Dockside plug
14.416.10	10	16	11.2	2.5	no
14.416.15	15	16	11.2	2.5	no
14.416.20	10	16	11.2	2.5	14.335.01 (16A)
14.416.25	15	16	11.2	2.5	14.335.01 (16A)

OSCULATI



Modular switches, sockets and plugs

B.
Berker Business Solutions


BERKER® original modular switches and sockets

To be fitted in FLOW single or double design frame models.
Single frame: 59.5x59.5 mm. Double frame: 59.5x178.5 mm.




Type	Product	Anthracite black	white	chromed
Module	16A single switch	14.520.01	14.520.02	14.520.03
	16A double switch	14.521.01	14.521.02	14.521.03
	16A diverter	14.522.01	14.522.02	14.522.03
	10A single push button	14.523.01*	14.523.02*	14.523.03*
	10A double push button	14.524.01*	14.524.02*	14.524.03*
	16A Italian power socket	14.525.01	14.525.02	-
	16A Schuko power socket	14.526.01	14.526.02	-
	USB A+C port 3+3A	14.527.01	-	-
Flow frames	Single frame	14.533.01	14.533.02	14.533.03
	Double frame	14.534.01	14.534.02	14.534.03
	Frame with spring hatch	14.536.01	14.536.02	14.536.03

- * For push-button+dimmer operation (Art. 14.540.00 required).
- 14.538.01 White lower rear protection cover, 22-mm protrusion, suitable for all modules 14.520/521/522/523/524.
 - 14.538.02 High protection rear cover, white color, 45 mm protrusion, suitable for modules 14.525/526/527.01.
 - 14.538.03 Spacer required for 14.520/521/522/523/524 modules installation without recess. Colour: black anthracite.
 - 14.538.04 Spacer required for 14.520/521/522/523/524 modules installation without recess. Colour: white.
 - 14.540.00 Mono channel mini dimmer: operates on multi-voltage from 5V to 24V DC.
- To be used with 14.523/14.524.xx push-buttons or similar to adjust the brightness of ceiling lights/spotlights with incandescent or LED bulbs (when fitted). Maximum load 192W (24V).

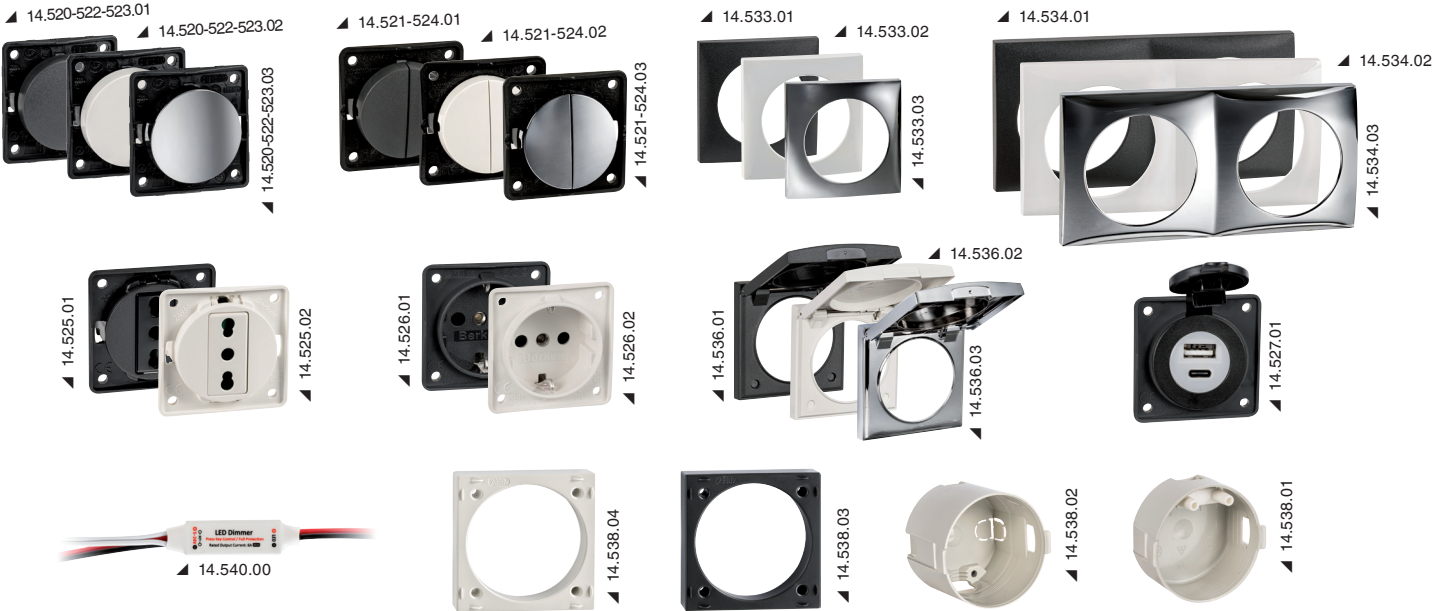

Switches and circuit breakers

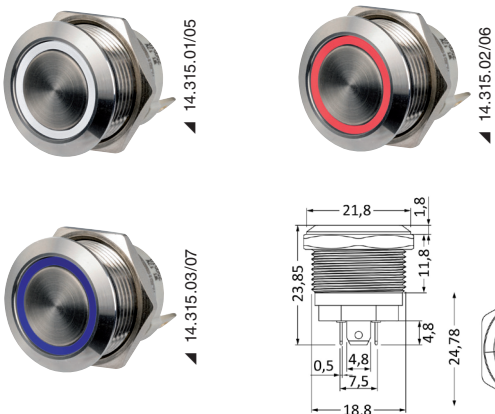

FLAT stainless steel switches 12/24V

12/24V SS316 LONG PIN

Vandal-proof FLAT switches with AISI 316 stainless steel body, manufactured with CNC. Compatible with 12V and 24V systems and have a capacity of 20A. Protection rating IP67. LED light ring in 3 different colors. Available in variants with standard ON-OFF and momentary ON.

White LED	Red LED	Blue LED	Function	V	A
14.315.01	14.315.02	14.315.03	ON-OFF	12/24	20
14.315.05	14.315.06	14.315.07	(ON momentary)-OFF	12/24	20





Battery switches

Compact battery switch

Supercompact model for mounting on instrument panel or bulkhead.
Positions: OFF-ON-OUT to pull out the antitheft knob.

Code	Max capacity A		Neck Ø mm	Flange Ø mm	Useful neck mm	Ø Terminals mm
	in continuous	intermittent				
14.385.20	100	150	26	45	11	6
14.385.22	300	450	49	55	15	10






Fairleads and glands

SCANSTRUT horizontal stuffing box

Made of fiberglass-reinforced nylon. IPX7 watertight. Supplied with pre-drilled seal and seal to be drilled. Display blister pack.

No sealant or silicone required for quick and clean installation.
The dual cable version is perfect for solar panels installation.

Code	Model	Colour	Material	Cable Ø mm	l Ax B x H mm	Outlets
14.171.42	DS-H6	grey	Plastic	2-6	28.5x46x20	1
14.171.62	DS-H10	grey	Plastic	6-10	44x78x27	1
14.176.01	DS-HD6-BLK	Black	Plastic	2-5/6	54x63x22	2
14.176.03	DS-HD6	grey	Plastic	2-5/6	54x63x22	2
14.176.02	DS-HD10-BLK	Black	Plastic	6-10	66.5x75.1x28.25	2
14.176.04	DS-HD10	grey	Plastic	6-10	66.5x75.1x28.25	2
14.176.10	DS-H-MULTI	Black	Plastic	up to 15	114,8x97,6x35,8	Multi-cable

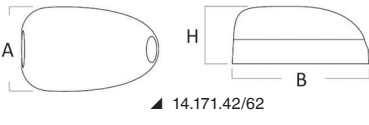

Plugs, lighter jacks and accessories

ROKK NEST recess-fit waterproof wireless charging pocket - 3-coil 15W

IPX6 Wireless battery charging pocket for bulkhead recess-fit mounting. To be integrated on consoles, seats, cushions, etc.
Just place your mobile phone on the grippy mat to instantly start wireless charging. No charging cable required. 12/24V charging. Compatible with any phone having a non-metallic casing at least 3mm thick.
Qi wireless charging technology (Apple, Samsung, Huawei, etc). IPX6 waterproof. Fitted with a water drainage system, it can also be used as a storage compartment.
The NEST charger features 3-coil technology that ensures a charging area over 80% larger than previous versions.
This implementation is the best one for mobiles with very powerful camera phones (15 W output power).

Code	Input V	Output W	l x B x H mm
14.515.26	12/24	15	142x106x157 (recess)



Showers and deck showers



Shower/Tap Removable Kit

Hand shower with PVC hose and quick connector for gardening. Designed to provide fast connections and versatile solutions, it is compatible with water outlets featuring quick connect. Usable both as a handheld shower and a tap, it connects and removes easily after use.

Code	Length m	Terminal joints	For hose connectors	Support for the tap
15.211.00	2.5	1/2" F + Quick Coupling for Gardening	16.441.18. 16.441.38. 16.441.75. 16.441.88. 16.441.95. 16.442.60. 16.442.61. 16.442.70. 16.442.71. 16.443.00. 16.444.00	17.019.02



17.019.02

Mizar spare shower head



Code	Model	Material
15.242.02	Push-button	Brass + plastic

Desy spare shower head



Code	Model	Material
15.238.03	Lever-operated	Chromed plastic

Spare shower head



Code	Model	Material
15.256.02	Lever-operated	Chromed plastic

Keji spare shower head



Code	Model	Material
15.237.02	Push-button	Chromed plastic

Tiger spare shower head



Code	Model	Material
15.247.02	Lever-operated	Stainless steel

White net PVC shower hose



"Full white" model more elegant than the traditional net version.

Code	Length m	Terminal joints
15.210.00	2.5	1/2" F + 3/8" F
15.210.01	4	1/2" F + 3/8" F

White nylon net shower hose



Made of nylon, with EPDM inside. Compared to net PVC hoses, it's extremely flexible and can be positioned more easily in its housing.

Code	Length m	Terminal joints
15.198.00	2.5	1/2" F + 3/8" F
15.198.01	4	1/2" F + 3/8" F

Polished stainless steel shower hose



Made of stainless steel with EPDM inside. Compared to net PVC hoses, it's extremely flexible and can be positioned more easily in its housing.

Code	Length m	Terminal joints
15.199.00	2.5	1/2" F + 3/8" F
15.199.01	4	1/2" F + 3/8" F

Europump fresh water pumps



Europump 4 low-consumption fresh water pump

CE Can serve 2 connections. Thermal protection against overloads. Can run dry without damage. Protection against polarity reversal.

**UK
CA**

Code	Pressure switch	Flow l/min	Current draw A	Hose adaptor Ø mm	Maximum dimensions in mm	Pressure switch spare parts	kg
	calibrated to						
16.503.12	2,8 BAR/40 PSI	3.8	2	10	170x100x60	16.540.01	0.7



OSCULATI




Europump 4 New Generation fresh water pump

IP 54 It can serve two outlets. Overload protection. It can run dry without getting damaged. IP54 watertight. Self-priming up to 1.5 metres. Pulsation-dampening by-pass system.

CE

Code	V	Current draw A	Flow l/min	Operating pressure bar	Snap hose holder mm	kg
16.501.12	12	4.5	5.6	2.8	10	0.7

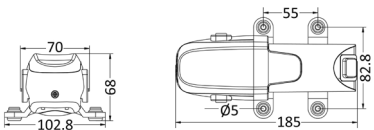

OSCULATI




Hose connectors and water hook-ups

Bayonet flush fitting for washdown

The device connects under deck to Washdown pumps or similar items and it keeps the pump under pressure. When the bayonet fitting connects the washing hose, the device automatically opens and activates the pump. 100% **stainless steel**. Garden-type quick fitting on the end caps (36.189.02).

Code	Description	Replacement plastic fitting
16.442.22	Bayonet fitting + straight plastic fitting	16.442.31 (right)
16.442.23	Bayonet fitting + sloped plastic fitting	16.442.30 (inclined)

The sloped fitting makes opening easier in case of high-pressure washdown pumps or when the fitting is in a position difficult to plug.



OSCULATI






Classic EVO quick-coupling washdown hose connector

It connects the onboard fresh water system or to the washdown salt water pump and it keeps the line under pressure. The washing hose plugs in onto the inlet and automatically activates the pump. UV resistant ASA box, **chromed brass** device.

☐ white	chromed	SS	<--- mm	
			Ø Recess	Internal protrusion
16.441.55	16.441.75	16.441.95	69	43

17.224.01 *OPTIONAL 1/2" male elbow fitting to plug into rear inlet hose*
36.189.01; 36.189.03; 36.189.04 *OPTIONAL Front male plug-in fitting*

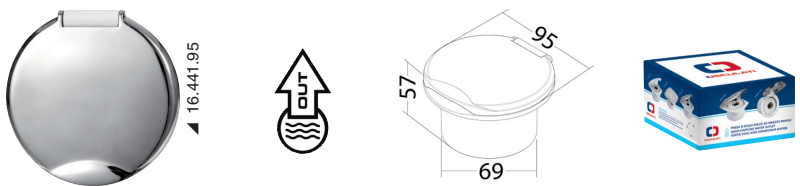

Heavy Duty Classic Evo recess-fit fresh water inlet

QUICK SWIVEL CONNECTION		PRESSURE REDUCING VALVE	
-------------------------	--	-------------------------	--

For the use of dockside water, this innovative system stably reduces the pressure to 3 bar, protecting the piping from potential damage. The compact device, equipped with an adjustable pressure regulator and orientable brass check valve, ensures a safe and constant flow. The dockside water hose can be easily connected using a gardening snap fitting (code 36.189.02). The outlet thread is 3/4" BSP. Even if the system remains connected to the dock, the pressure is maintained stable at 3 bar, regardless of the supply network pressure.

☐ white	chromed	SS	<--- mm	
			Ø Recess	Internal protrusion
16.445.53	16.445.73	16.445.83	69	110-110



Push to close latches



Plastic flush pull latches

Made of **white nylon**, fitted with **stainless steel** lock stopper and two 2 mm stoppers.

Code	Version	Colour	Recess Ø mm	External Ø mm	Inner size mm	Accepts thicknesses mm
38.147.00	without lock	white	49.6	61.4	38.8	from 7 to 18
38.147.01	without lock	Black	49.6	61.4	38.8	from 7 to 18
38.147.20	With lock	white	49.6	61.4	38.8	from 7 to 18
38.147.21	With lock	Black	49.6	61.4	38.8	from 7 to 18



Lift and turn latches



LIFT & TURN compression latch


38.161.XX

Characterized by a particularly easy grip, they enclose all the best features of the pull latches in a single model.



AVAILABLE

Black Line

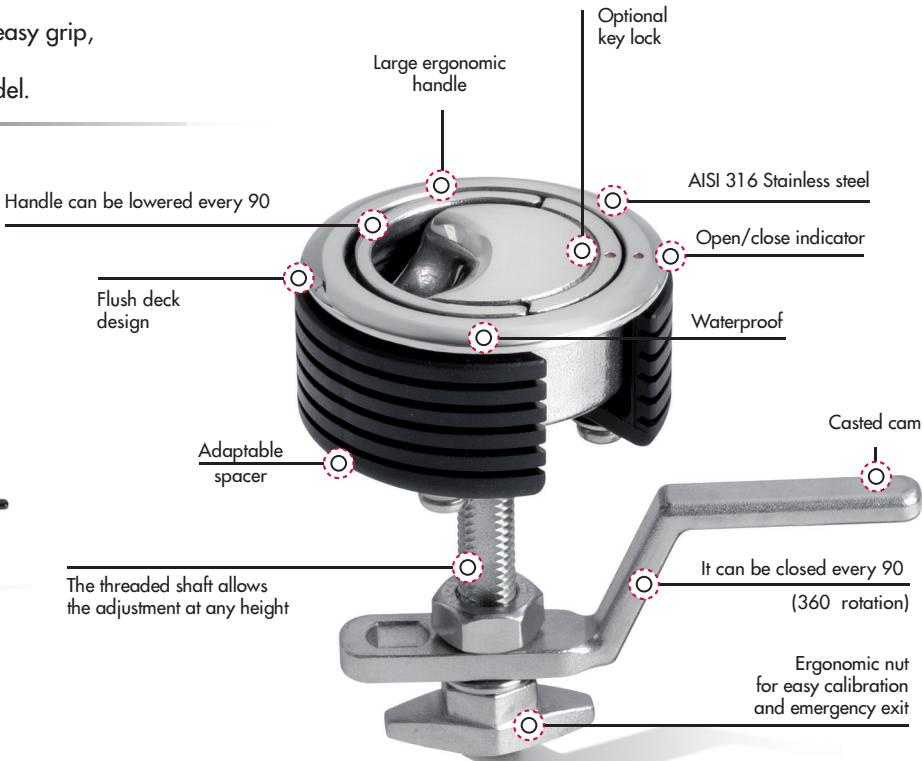

Eclipse LIFT & TURN flush latch (with compression closure) - SMALL



COMPRESSION SYSTEM

EXTRA LARGE HANDLE


Featuring a very comfortable grip, it offers all the best characteristics in a single flush deck design model.

- 316 mirror-polished stainless steel;
- flush aesthetics;
- large ergonomic handle;
- Handle can be lowered every 90°.
- Foldable handle every 90°;
- visual indicator open/closed;
- ergonomic nut for easy calibration and allowing for emergency exit;
- straight cam suitable for sliding door closure;
- cam with two possible positions;
- plastic spacer with invitations for custom cutting.


Polished SS version	Black SS version	Lock	External Ø mm	Bore Ø mm	Bulkhead thickness mm	Stop stroke mm
38.161.01	38.161.61	no	60	50	3-26	22-94
38.161.02	38.161.62	Yes	60	50	3-26	22-94




Key for 38.161.02



Universal straight cam included



Angled cam included



Spacer included

Table pedestals and legs



OSCULATI



Coated aluminium table pedestal

White epoxy coated finish. It includes two aluminium bases (one external and one for flush mounting) model 48.418.01 and an anodized aluminium tube model 48.418.21.

Code	Height mm	Tube Ø mm	Tube	Table base Ø mm	Floor recess base	Base	Spare floor base	Spare table base
48.418.22	700	60	White painted aluminium	165	160	White painted aluminium	48.416.12	48.416.13

White epoxy coated.

OSCULATI



HEAVY DUTY Giant table pedestal

GAS SPRING /
MOLLA A GAS

Made of mirror-polished anodized aluminium. Fitted with **gas spring** for upstroke. **No need to bore the floor for downstroke.** Tri-telescopic.

Code	Height mm	Tube Ø mm	Extra-flat base Ø mm	Table plate mm	OPTIONAL extension kit
48.720.01	345/714	100/88/72	305	305x305	48.724.01; 48.724.02




OSCULATI



Giant Heavy Duty black table pedestal

Made of black anodized aluminium with black plastic fastening collars for a total black effect. Fitted with gas spring for upstroke, no need to bore the floor for downstroke. Tri-telescopic.

Code	Height mm	Tube Ø mm	Extra-flat base Ø mm	Table plate mm	OPTIONAL extension kit
48.720.04	345/714	100/88/72	305	305x305	48.724.01; 48.724.02



Water heaters and accessories



12V Mini boat boiler

12V

Mini boiler for boats in AISI 316L stainless steel, impact-resistant, with thermal insulation in polyurethane foam. Equipped with an incoloy heating element and a probe sheath that allows the water temperature inside the boiler to be detected via thermostat. Supplied with safety valve and adjustable brackets.

Code	Volume litres	V	W	↳ LxØ mm	kg
50.589.06	6	12	300	459x190	4.1


OSCULATI refrigerators



Fridge Frigo° with clean touch front panel

Versatile and compact fridges. Easily installed in any boat or vehicle. Features a convenient freezer compartment. Equipped with a high-performance compressor and low energy consumption, with internal control command to adjust the temperature and an antifingerprint treated, anodized brushed aluminum door panel. Reversible door opening. Available finishing frames that allow flush or protruding installation.

Code	Capacity l	V	mm			kg	OPTIONAL frame
			Width	depth	Height		
50.961.00	50	12/24	380	500	535	17	50.961.30
50.961.02	85	12/24	475	555	635	21	50.961.32

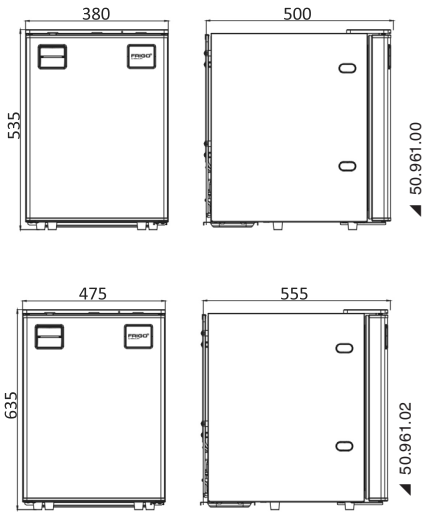

FRIGO°
by OSCULATI





Integrated crystal glass/stainless steel hob units

Cooktops with steel glass lid

Stainless steel cooktops with smoked tempered glass lid, complete with hot and cold water mixer tap.

Code	With sink	No of burners	mm			Burners W	OPTIONAL pot holder
			outside	inside	recess depth		
50.714.01	right	1	526x326	515x325	163	1800	50.100.91
50.714.02	left	1	526x326	515x325	163	1800	50.100.91
50.714.03	right	2	726x346	688x319	140	1800+1000	50.100.92
50.714.04	left	2	720x346	688x319	140	1800+1000	50.100.92



Water tanks

OSCULATI


Tank with fresh water pump, can be rotated by 90°



Polyethylene tank already assembled with fresh water pump type 16.503.12. Recommended for one outlet.

When rotated at 90°, it height varies from 34 to 26 cm according to your needs.

Code	Capacity	Capacity l	Fresh water tank outlet Ø mm	Inlet joint Ø mm	Vent Ø mm	Bracket	Standard thickness mm +/- 5%*	↔ outside mm
52.194.21	3.8 l/min at 12 V	31	10	38	16	52.195.00	4	400x260x340
52.194.22	3.8 l/min at 12 V	48	10	38	16	52.195.00	4	600x260x340

Can be installed with base 340x400 (height 260 mm) or base 400x260 (height 340 mm). Made-ready for bracket mounting 52.195.00.

* Our fresh water tank thickness is calculated for standard use of tanks to be installed on leisure boats. The installer or the designer shall be responsible for checking that both the tanks and their mounting systems comply with the required use. Technical support shall be requested, if necessary. The option to require on demand tanks increased in thickness.



Electric inflator pumps

SCANSTRUT


ATMOS Integrated Air Station 12V

IPX6
INFLATE/DEFLATE
IGNITION PROTECTION

The built-in ATMOS onboard inflator combines a high airflow able to reach high pressures (20 psi / 1.37 Bar). Suitable for any type of inflatable: tender, SUP, towables

Waterproof (IPX6) and designed to withstand harsh marine environmental conditions.

The next-generation technology provides fast and effortless inflation and deflation.

Compact and flat, ATMOS fits almost all panels on board. It comes with inflation tube (2.5 mt.) and a universal valve fittings kit.

User-friendly and ready for use: you just have to set the target pressure on the display and start it.

The inflator automatically stops when the desired pressure is reached.

ATMOS is ignition protection certified (ISO 8846), allowing the inflator to be installed near boat areas containing flammable gases or fuel. It complies with EMC CE-RED directive (2014/53/EU) and EN 62368 standard.

Comes with a comfortable and durable Storage Bag complete with accessories.

Average inflation time for SUP: 6-8 minutes.


Certifications: CE, ROHS, UN ECE R10, UKCA

Compliant with standards: ISO 8846 and SAE J1171

Code	Scanstrut Code	Function	V	W	A	Max pressure	Flowrate / Pressure	Installation angle	↔ mm
66.452.01	SC-AOB-A2	Inflation+deflation	12	140	12	1.37 BAR (20 PSI)	350 l/min (0-1 PSI) - 70 l/min (1-20 PSI)	+10° to -30°	297x123x198



66.452.10 Sun Cover white ATMOS optional to the black one.

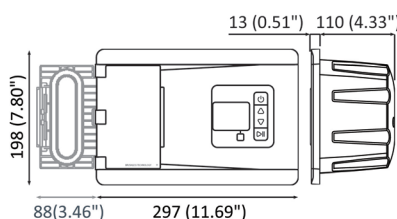

Nice parts for your BOAT or your RV



Can't find what you are looking for?
Many other products are available on our website

www.OSCULATI.com





Osculati S.r.l.

Via Pacinotti 12 - 20054 Segrate (Milano) - Italy
sales@osculati.com

www.OSCULATI.com



IT AEO-F 23 2010