

Katalog von

Accon Marine, L.L.C.
~~~~~

## SURFACE MOUNT FOLDING CLEATS

Modell sichtbare Verschraubung



260 333

Modell sichtbare Verschraubung



260 332  
GESCHLOSSEN



260 332S  
HOCHGEKLAPPT

Modell mit Gewindestangen



260 334  
GESCHLOSSEN



260 334  
HOCHGEKLAPPT

### BEST.-NR. # DESCRIPTION


|             |                                      |
|-------------|--------------------------------------|
| 260 335 35  | 3 1/2" / 114 mm sichtbar geschraubt. |
| 260 335 35S | 3 1/2" / 114 mm mit Gewindestangen.  |
| 260 333 4   | 4 1/2" / 159 mm sichtbar geschraubt. |
| 260 334 4 S | 4 1/2" / 159 mm mit Gewindestangen.  |
| 260 332 6   | 6" / 190 mm sichtbar geschraubt.     |
| 260 332 6S  | 6" / 190 mm mit Gewindestangen.      |
| 260 332 8   | 8" / 250 mm sichtbar geschraubt.     |
| 260 332 8S  | 8" / 250 mm mit Gewindestangen.      |

### FEATURES

- ◆ Mounts on surface of boat. No cut-outs or hole saws required.
- ◆ These cleats lock down when not needed, and spring up when release button is pushed in.
- ◆ No drain tubes or drain receptacles required. They do not leak into the boat.
- ◆ The most simple installation of any retractable cleat in the industry.
- ◆ Constructed of marine grade 316 cast S.S. and brightly polished.
- ◆ Two styles to choose from: The stud mount (with hidden fasteners) or through bolted (with visible screw holes). Stud length is 1 1/2".

### INSTALLATION

- ◆ Drill two holes with standard drill bits for the mounting screws or studs.

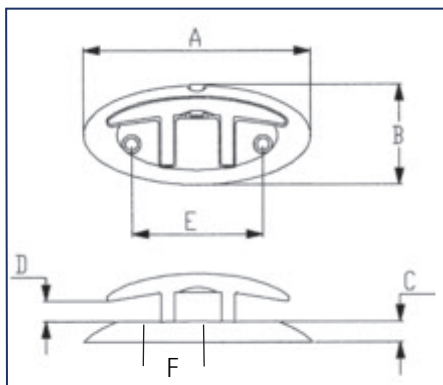

### PRODUCT SPECIFICATIONS / Ca. Maßangaben

| BEST.-NR. #        | 26033335 | 26033335S | 26063334 | 26063344 | 26063336 | 26063346 | 260332-8 | 260332 8S |
|--------------------|----------|-----------|----------|----------|----------|----------|----------|-----------|
| Größe              | 3 1/2"   | 3 1/2"    | 4 1/2"   | 4 1/2"   | 6"       | 6"       | 8"       | 8"        |
| Gewicht            | 0.5 lb.  | 0.55 lbs. | 1.04 lb. | 1.18 lb. | 1.68 lb. | 1.88 lb. | 4.18 lb. | 4.52 lb.  |
| "A" Länge mm       | 114      | 114       | 159      | 159      | 190      | 190      | 250      | 250       |
| "B" Breite mm      | 50       | 50        | 62       | 62       | 83       | 83       | 110      | 110       |
| "C" Höhe mm        | 10       | 10        | 13       | 13       | 17       | 17       | 23       | 23        |
| "D" Abstand mm     | 12       | 12        | 14       | 14       | 19       | 19       | 24       | 24        |
| "E" Lochabstand mm | 58       | 58        | 86       | 86       | 110      | 110      | 145      | 145       |
| "F" Abstand mm     | 21       | 21        | 29       | 29       | 38       | 38       | 51       | 51        |
| Stehbolzen Ø       | N/A      | 1/4"      | N/A      | 5/16"    | N/A      | 3/8"     | N/A      | 1/2"      |
| Max mm             | 10       | 10        | 12       | 12       | 15       | 15       | 19       | 19        |

### SCREWS REQUIRED

|          |      |     |      |     |       |     |      |      |
|----------|------|-----|------|-----|-------|-----|------|------|
| Quantity | 2    | N/A | 2    | N/A | 2     | N/A | 2    | N/A  |
| Diameter | 1/4" | N/A | 1/4" | N/A | 5/16" | N/A | 1/2" | N/A  |
| Studs    | N/A  | 2"  | N/A  | 2"  | N/A   | 2"  | N/A  | 3.5" |

**Achtung:** Version "S" mit Gewindestangen, während die Standard-Klappen mit sichtbaren Schrauben von oben geschraubt werden.

## POP-UP® CLEAT

— Flush Mounted —  
**POP-UP®**  
**C·L·E·A·T**




### FEATURES

- ◆ Cleat pops up at the touch of a button – simply push it back down when it is no longer needed and it locks in the flush position.
- ◆ In the up position, Pop-Up® Cleats function exactly like conventional cleats.
- ◆ Available in four sizes, 4 1/2", 6", 8" & 10".
- ◆ Made of marine grade 316 stainless steel.

Alle Modell von oben mit 4 sichtbaren Schrauben verschraubt.

### INSTALLATION

- ◆ Each cleat is shipped with a backing plate which also serves as the cut-out template.
- ◆ Use the supplied backing plate as a template to scribe the outline of the cut-out.
- ◆ After cutting out the shape, insert Pop-Up® Cleat into opening and transfer mounting holes from cleat into deck.
- ◆ Attach the backing plate and waterproofing cup (if needed) below the deck.
- ◆ Attach with four screws (not included) and four nuts (not included). Please see specification chart for screw sizes required.

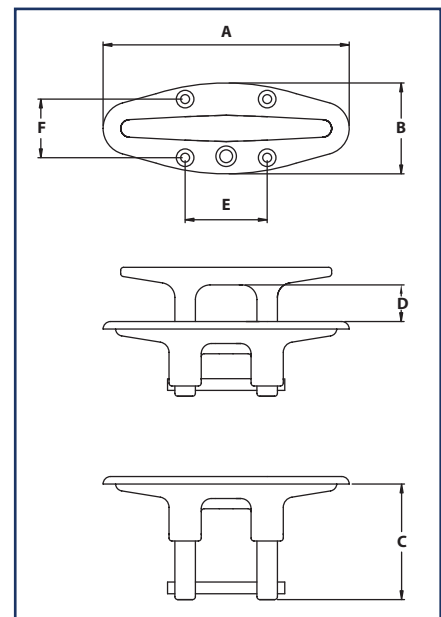

### PRODUCT SPECIFICATIONS / Ca. Maßangaben

| BEST.-NR.          | 260 110 21 | 260 150 21 | 260 200 21 | 260 250 21 |
|--------------------|------------|------------|------------|------------|
| Größe              | 4 1/2"     | 6"         | 8"         | 10"        |
| Gewicht            | 1 lb.      | 1.5 lb.    | 2.5 lb.    | 4.2 lb.    |
| "A" Länge mm       | 132        | 170        | 230        | 275        |
| "B" Breite mm      | 48         | 60         | 70         | 85         |
| "C" Höhe mm        | 76         | 76         | 95         | 110        |
| "D" Abstand        | 22         | 25         | 29         | 35         |
| "E" Lochabstand mm | 44         | 57         | 70         | 95         |
| "F" Lochabstand mm | 32         | 38         | 45         | 60         |
| Max Line Size Ø mm | 12         | 15         | 19         | 25         |

### SCREWS REQUIRED

|          |       |      |      |       |
|----------|-------|------|------|-------|
| Quantity | 4     | 4    | 4    | 4     |
| Diameter | 3/16" | 1/4" | 1/4" | 5/16" |

## POP-UP® CLEAT OPTIONAL ITEMS



Erhältliche Gegenplatten

### TOP-MOUNT BACKING PLATES

| BEST.-NR. #   | DESCRIPTION                    |
|---------------|--------------------------------|
| 260 202 4TMP  | 4 1/2" Top mount backing plate |
| 260 202 6TMP  | 6" Top mount backing plate     |
| 260 202 8TMP  | 8" Top mount backing plate     |
| 260 202 10TMP | 10" Top mount backing plate    |

#### FEATURES

- ◆ Allows for easy installation from above the deck.
- ◆ No need for access below the deck.



Wassersammler mit Schlauchanschluss

### OPTIONAL WATERPROOFING CUS

| BEST.-NR. # | DESCRIPTION              |
|-------------|--------------------------|
| 260 110 12  | 4 1/2" Waterproofing Cup |
| 260 150 12  | 6" Waterproofing Cup     |
| 260 200 12  | 8" Waterproofing Cup     |
| 260 250 12  | 10" Waterproofing Cup    |

#### FEATURES

- ◆ Prevents unwanted water runoff below deck.

### INSTALLATION

- ◆ Place the template (backing plate) in the desired location. Make sure that there is adequate clearance for the Pop-Up® mechanism below the deck.
- ◆ Trace the cleat cut-out area and spot the small threaded hole. Do not spot the four mounting holes yet.
- ◆ Cut out the cleat installation area.
- ◆ Drill a 3/16" diameter hole for the #6 screw.
- ◆ Place cleat in cut-out and spot the four mounting holes.
- ◆ Remove the cleat and drill the four mounting holes.
- ◆ Place the backing plate through the cut-out and install the #6 screw through the deck into the backing plate. Be careful not to drop the backing plate down into the hull. Do not over tighten the #6 screw.
- ◆ Replace the cleat into the cut-out and install the four mounting screws through the cleat and deck into the backing plate.



Weitere Modelle finden Sie hier.

## WIDE-LINE CLEATS



### FEATURES

- ◆ Sleek, low profile appearance.
- ◆ Large flange helps cover rough cut-out area.
- ◆ Made of marine grade 316 stainless steel.
- ◆ Mounts from the bottom via welded stainless steel threaded studs.

### INSTALLATION

- ◆ Each cleat is shipped with a backing plate which also serves as the cut-out template.
- ◆ Drill four holes and saw-cut clearance between the two center holes.

### OPTIONAL WATERPROOFING CUP


- ◆ Prevents unwanted runoff below deck
- ◆ Specify product number when ordering:

260 305 4C (4 1/2")

260 305 6C (6")

260 305 8C (8")


260 305 10C (10")

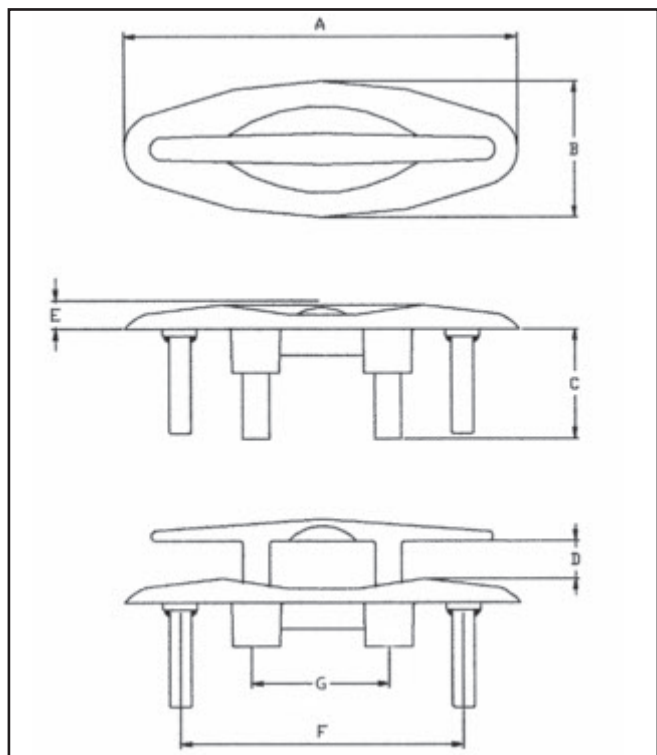

### PRODUCT SPECIFICATIONS / Ca. Maßangaben

| BEST.-NR. #        | 260 305 4 | 260 305 6 | 260 305 8 | 260 305 10 |
|--------------------|-----------|-----------|-----------|------------|
| Größe              | 4 1/2"    | 6"        | 8"        | 10"        |
| Gewicht            | 0.82 lbs. | 1.34 lbs. | 2.70 lbs. | 5.04 lbs.  |
| "A" Länge mm       | 135       | 175       | 230       | 280        |
| "B" Breite mm      | 50        | 60        | 72        | 90         |
| "C" Höhe mm        | 65        | 76        | 94        | 121        |
| "D" Abstand mm     | 13        | 18        | 26        | 26         |
| "E" Höhe mm        | 10        | 13        | 17        | 21         |
| "F" Lochabstand mm | 95        | 125       | 155       | 190        |
| "G" Abstand mm     | 45        | 59        | 76        | 98         |
| Thread Size        | 5/16-18   | 3/8-16    | 3/8-16    | 1/2-13     |
| Stehbolzen mm      | 41        | 48        | 67        | 76         |
| Max Line Size Ø mm | 9         | 14        | 19        | 25         |

## SLIM-LINE™ CLEATS

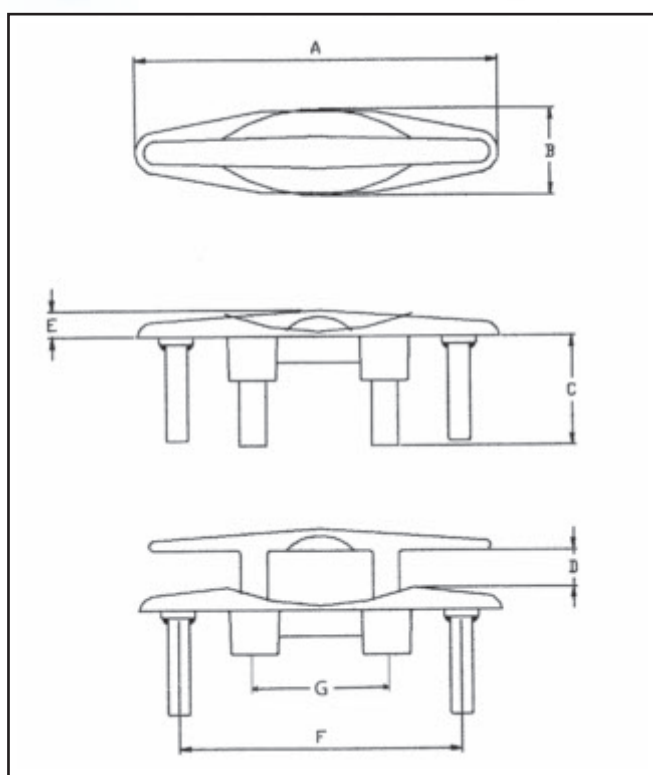

### FEATURES

- ◆ Sleek, narrow design allows for installation where other flush-mounted cleats won't fit.
- ◆ Made of marine grade 316 stainless steel.
- ◆ Easy to pull up – the recess in the base allows the cleat to be grasped quickly and easily.

### INSTALLATION

- ◆ Each cleat is shipped with a backing plate which also serves as the cut-out template.
- ◆ Drill four holes and saw-cut clearance between the two center holes.

### OPTIONAL WATERPROOFING CUP

- ◆ Prevents unwanted runoff below deck
- ◆ Specify product number when ordering:

260 304 4C (4 1/2")  
260 304 6C (6")  
260 304-8-C (8")  
260 304 10C (10")

### PRODUCT SPECIFICATIONS / Ca. Maßangaben

| BEST.-NR. #        | 260304-4  | 260 304 6 | 260 500 12 | 260 304 10 |
|--------------------|-----------|-----------|------------|------------|
| Größe              | 4 1/2"    | 6"        | 8"         | 10"        |
| Gewicht            | 0.82 lbs. | 1.34 lbs. | 2.70 lbs.  | 5.04 lbs.  |
| "A" Länge mm       | 127       | 160       | 230        | 280        |
| "B" Breite mm      | 33        | 38        | 50         | 71         |
| "C" Höhe mm        | 46        | 54        | 69         | 84         |
| "D" Abstand mm     | 14        | 20        | 25         | 25         |
| "E" Height mm      | 13        | 14        | 18         | 22         |
| "F" Lochabstand mm | 95        | 125       | 155        | 190        |
| "G" Distance mm    | 45        | 59        | 76         | 95         |
| Thread Size        | 5/16-18   | 3/8-16    | 3/8-16     | 1/2-13     |
| Stehbolzen mm      | 41        | 47        | 67         | 72         |
| Max Line Size Ø mm | 12        | 15        | 19         | 25         |

## 12" PULL-UP CLEAT



260 205 12



260 205 12


| BEST.-NR. # | DESCRIPTION                     |
|-------------|---------------------------------|
| 260 205 12  | 12" Pull-Up Cleat 340 mm Klampe |

### FEATURES

- ◆ Marine grade 316 stainless steel.
- ◆ Each cleat is supplied with a waterproofing cup.

### INSTALLATION

- ◆ Each cleat is shipped with a backing plate which also serves as the cut-out template.
- ◆ Fasten with four 5/16" diameter screws (not included).

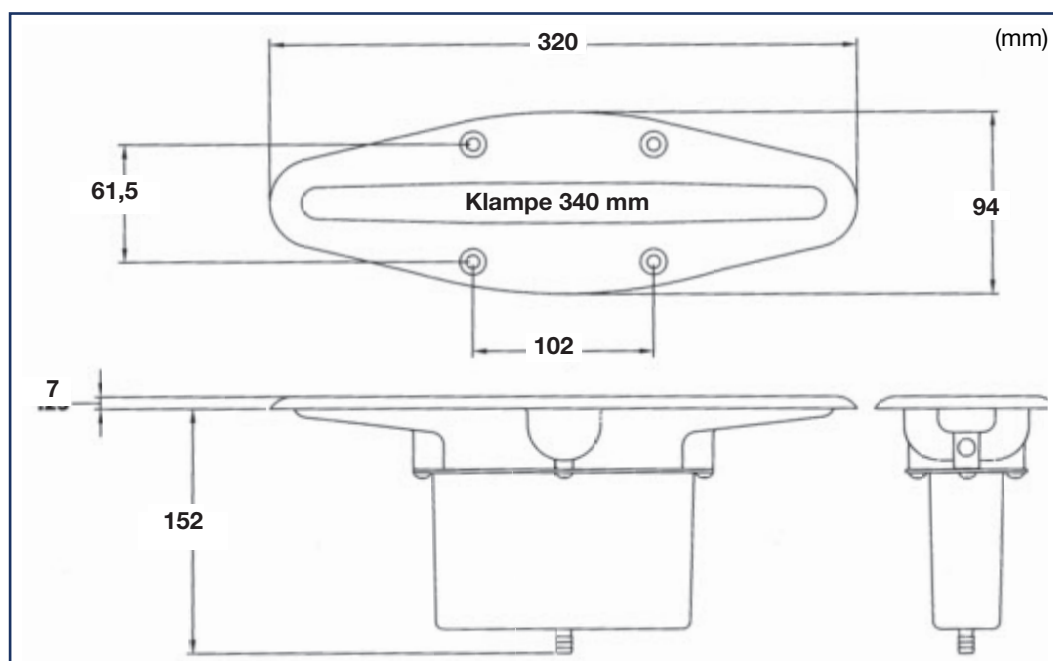

## 15" PULL-UP CLEAT



260 115 15S



260 115 15S

### BEST.-NR. # DESCRIPTION

**260 115 15** 15" Pull-Up Cleat – Through-Bolted 380 mm Klampe


**260 115 15S** 15" Pull-Up Cleat – Stud Mount

### FEATURES

- ◆ The largest flush-mounted cleat available!
- ◆ Marine grade 316 stainless steel.
- ◆ Available in both stud mount and through-bolt versions.
- ◆ Stud length is 4" on 260 115 15S.
- ◆ Each cleat is supplied with a waterproofing cup.

### INSTALLATION

- ◆ Each cleat is shipped with a backing plate which also serves as the cut-out template.
- ◆ Fasten with four 3/8" diameter screws (not included).

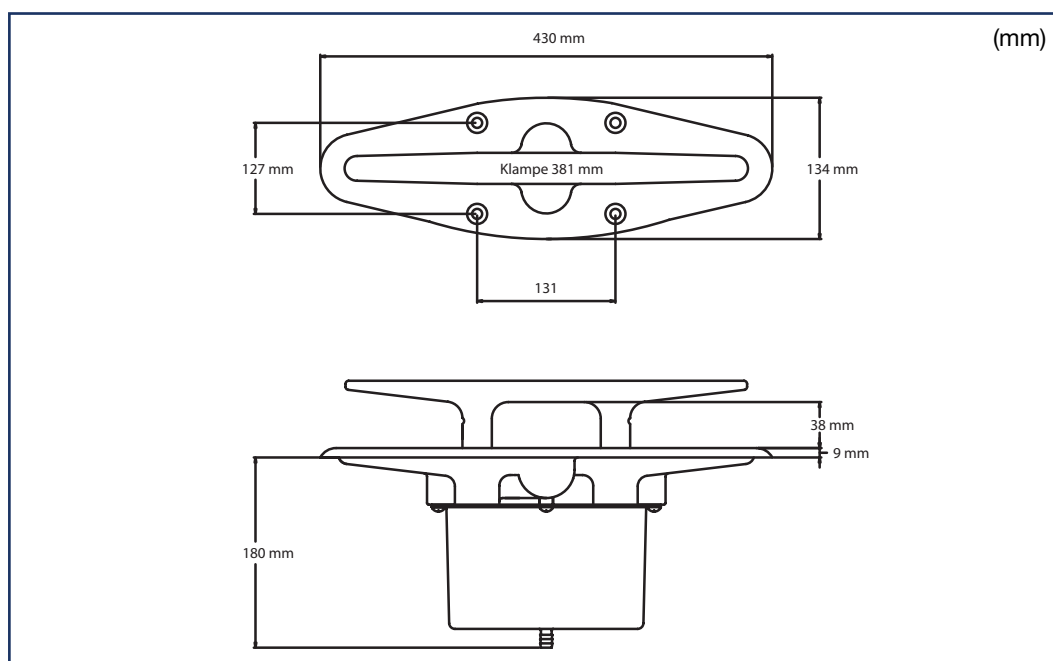

## 460 STYLE PULL-UP CLEATS



### PULL-UP CLEAT SERIES 460

#### FEATURES


- ◆ No cut-out required
- ◆ Mounded base allows water to run off the cleat
- ◆ Made of marine grade 316 stainless steel

#### INSTALLATION

- ◆ Drill two holes with a hole saw, as specified for each cleat size in the chart below.
- ◆ Install cleat through holes in deck.
- ◆ Install external tooth lock washer (smooth side up) against the deck. The sharp edges should grab the nut flange and dig in.
- ◆ A thread lock product such as Loctite™ or similar product will insure that the nuts will not loosen.


#### PRODUCT SPECIFICATIONS / Ca. Maßangaben

| BEST.-NR. #         | 260 460 4 | 260 460 6 | 260 460 8 |
|---------------------|-----------|-----------|-----------|
| Größe               | 4 1/2"    | 6"        | 8"        |
| Gewicht             | 0.80 lbs. | 1.2 lbs.  | 2.56 lbs. |
| "A" Länge mm        | 114       | 152       | 203       |
| "B" Breite mm       | 29        | 38        | 50        |
| "C" Tiefe mm        | 50        | 58        | 78        |
| "D" Abstand         | 19        | 25        | 32        |
| "E" Leg Distance mm | 45        | 60        | 81        |
| Hole Size           | 3/4"      | 7/8"      | 1 1/8"    |
| Max Line Size Ø mm  | 12        | 19        | 25        |
| Thread Size         | 3/4-16    | 7/8-14    | 1 1/2-14  |

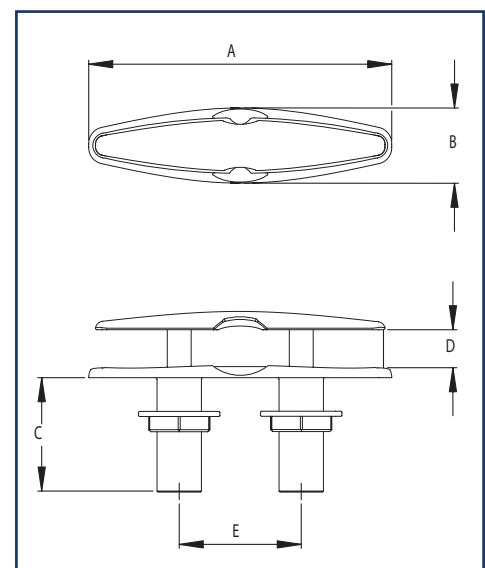

Weitere Modelle finden Sie hier.

## POP-UP® LIGHTS

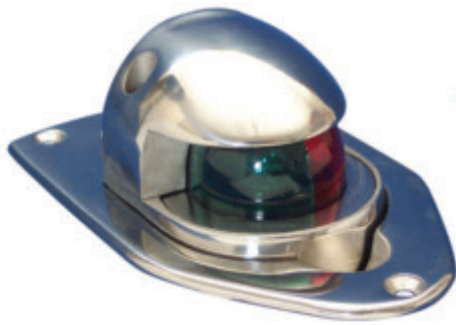

260 204 M


| BEST.-NR. # | DESCRIPTION                                  |
|-------------|----------------------------------------------|
| 260 204 M   | Stainless Steel Pop-Up® Buglicht Rot/Grün    |
| 260 205 M   | Stainless Steel Pop-Up® Backboard            |
| 260 260 M   | Stainless Steel Pop-Up® Steuerbord           |
| 260 207 M   | Set of Stainless Steel Pop-Up® Seitenmontage |
| 260 300 12  | Stainless Steel Pop-Up Buglicht weiß         |
| 260 204 MC  | Wassersammler (für alle geeignet)            |

### FEATURES

- ◆ Keeps deck free of protruding lights.
- ◆ Marine grade 316 stainless steel.
- ◆ Bow, port, starboard and side lights are available.
- ◆ Folds down flush when not in use.
- ◆ Uses a #78 bulb, 12 volts, 2.5 watts
- ◆ USCG approved 1 nautical mile.
- ◆ NMMA type accepted.
- ◆ Meets 72 Colregs.

### INSTALLATION

- ◆ Each light is supplied with a cut-out template.
- ◆ Use the supplied template to make a cut-out where the light will go.
- ◆ Fasten with three #10 screws (not included).

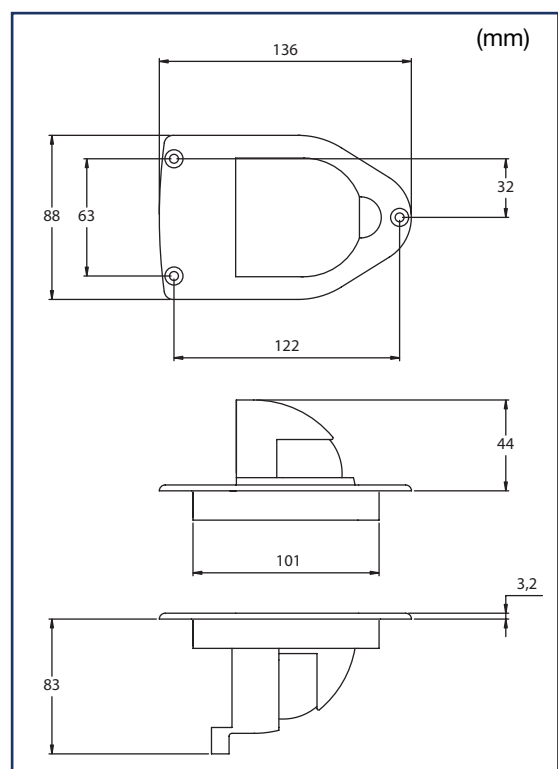

260 260 M  
AUF DECK MONTAGE



260 207 M  
SEITENMONTAGE



260 204 MC  
WASSERSAMMLER FÜR  
SCHLAUCHANSCHLUSS

Diese Leuchten sind nicht BSH zugelassen!

## LED POP-UP® BOW LIGHT





| BEST.-NR. # | DESCRIPTION                   |
|-------------|-------------------------------|
| 260 211 M   | Pop-Up® LED Buglicht Rot/Grün |
| 260 211 MC  | Wassersammler                 |

### FEATURES

- ◆ Fits in the same cut-out as our 204M light for easy upgrading.
- ◆ USCG approved 2 nautical miles.
- ◆ Keeps deck free of protruding lights, folds down flush with deck when not in use.
- ◆ Made of marine grade 316 stainless steel.
- ◆ An optional plastic cup prevents unwanted water runoff below deck.
- ◆ 115 milli-amps.

### INSTALLATION

- ◆ Each light is supplied with a cut-out template.
- ◆ Use the supplied template to make a cut-out where the light will go.
- ◆ Fasten with three #10 screws (not included).

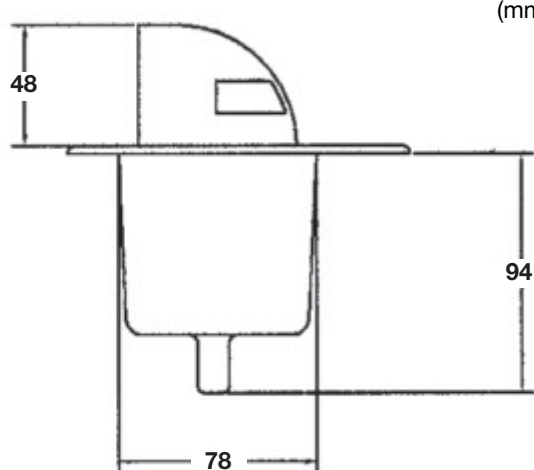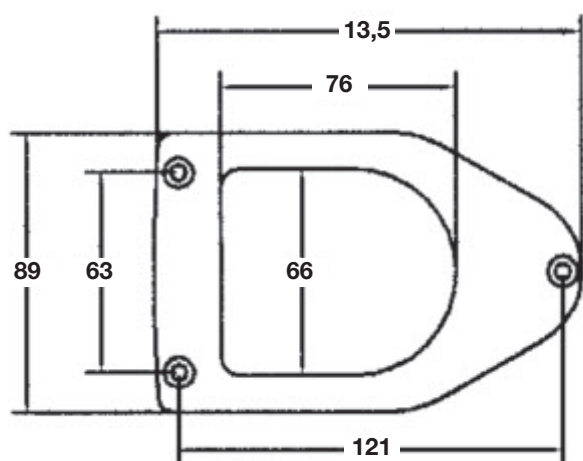

(mm)

Diese Leuchten sind nicht BSH zugelassen!

## LED POP-UP® BOW LIGHT



### POP-UP® LED BOW LIGHT


| BEST.-NR. # | DESCRIPTION                     |
|-------------|---------------------------------|
| 260 210 M   | Pop-Up® LED Bugleuchte Rot/Grün |
| 260 210 MC  | Wassersammler                   |
| 260 210 MS  | Buglicht mit Stehbolzen Montage |

#### FEATURES

- ◆ USCG Approved 2 nautical miles.
- ◆ The only Pop-Up® LED light on the market.
- ◆ Keeps deck free of protruding lights, folds down flush with deck when not in use.
- ◆ Made of marine grade 316 stainless steel.
- ◆ An optional plastic cup prevents unwanted water runoff below deck.
- ◆ Available in stud-mount or though bolt versions.

#### INSTALLATION

- ◆ Drill a 3 1/2" diameter hole using a hole saw.
- ◆ Fasten with three #10 screws (not included).

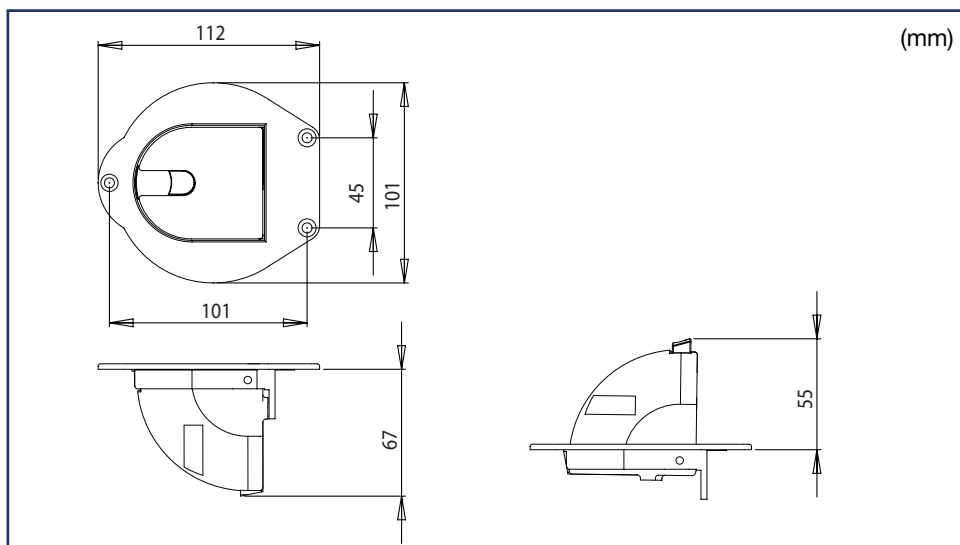

Diese Leuchten sind nicht BSH zugelassen!