Pfeiffer Marine

Katalog von

Accon Marine, L.L.C.

Surface Mount Folding Cleats

Modell sichtbare Verschraubung



260 333

Modell sichtbare Verschraubung



260 332
GESCHLOSSEN



260 332S
HOCHGEKLAPPT


Modell mit Gewindestangen



260 334
GESCHLOSSEN



260 334
HOCHGEKLAPPT

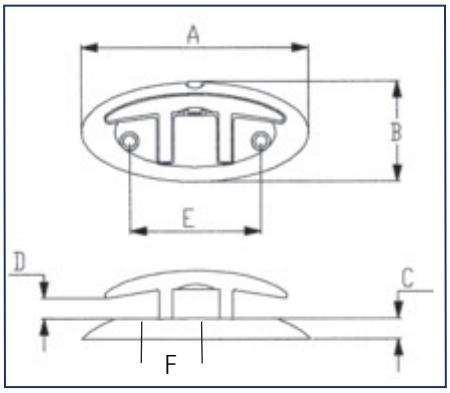

BEST.-NR. # DESCRIPTION

260 335 35	3 1/2" /114 mm sichtbar geschraubt.
260 335 35S	3 1/2" /114 mm mit Gewindestangen.
260 333 4	4 1/2" /159 mm sichtbar geschraubt.
260 334 4 S	4 1/2" /159 mm mit Gewindestangen.
260 332 6	6" /190 mm sichtbar geschraubt.
260 332 6S	6" /190 mm mit Gewindestangen.
260 332 8	8" /250 mm sichtbar geschraubt.
260 332 8S	8" /250 mm mit Gewindestangen.

FEATURES

- Mounts on surface of boat. No cut-outs or hole saws required.
- These cleats lock down when not needed, and spring up when release button is pushed in.
- No drain tubes or drain receptacles required. They do not leak into the boat.
- The most simple installation of any retractable cleat in the industry.
- Constructed of marine grade 316 cast S.S. and brightly polished.
- Two styles to choose from: The stud mount (with hidden fasteners) or through bolted (with visible screw holes). Stud length is 1 1/2".

INSTALLATION

- Drill two holes with standard drill bits for the mounting screws or studs.

PRODUCT SPECIFICATIONS / Ca. Maßangaben

BEST.-NR. #	26033335	26033335S	26063334	26063344	26063336	26063346	260332-8	260332 8S
Größe	3 1/2"	3 1/2"	4 1/2"	4 1/2"	6"	6"	8"	8"
Gewicht	0.5 lb.	0.55 lbs.	1.04 lb.	1.18 lb.	1.68 lb.	1.88 lb.	4.18 lb.	4.52 lb.
"A" Länge mm	114	114	159	159	190	190	250	250
"B" Breite mm	50	50	62	62	83	83	110	110
"C" Höhe mm	10	10	13	13	17	17	23	23
"D" Abstand mm	12	12	14	14	19	19	24	24
"E" Lochabstand mm	58	58	86	86	110	110	145	145
"F" Abstand mm	21	21	29	29	38	38	51	51
Stehbolzen Ø	N/A	1/4"	N/A	5/16"	N/A	3/8"	N/A	1/2"
Max mm	10	10	12	12	15	15	19	19

SCREWS REQUIRED

Quantity	2	N/A	2	N/A	2	N/A	2	N/A
Diameter	1/4"	N/A	1/4"	N/A	5/16"	N/A	1/2"	N/A
Studs	N/A	2"	N/A	2"	N/A	2"	N/A	3.5"

Achtung: Version "S" mit Gewindestangen, während die Standard-Klampen mit sichtbaren Schrauben von oben geschraubt werden.

Pop-Up® Cleat


Flush Mounted
POP-UP®
C·L·E·A·T



FEATURES

- Cleat pops up at the touch of a button – simply push it back down when it is no longer needed and it locks in the flush position.
- In the up position, Pop-Up® Cleats function exactly like conventional cleats.
- Available in four sizes, 4 1/2", 6", 8" & 10".
- Made of marine grade 316 stainless steel.

Alle Modell von oben mit 4 sichtbaren Schrauben verschraubt.

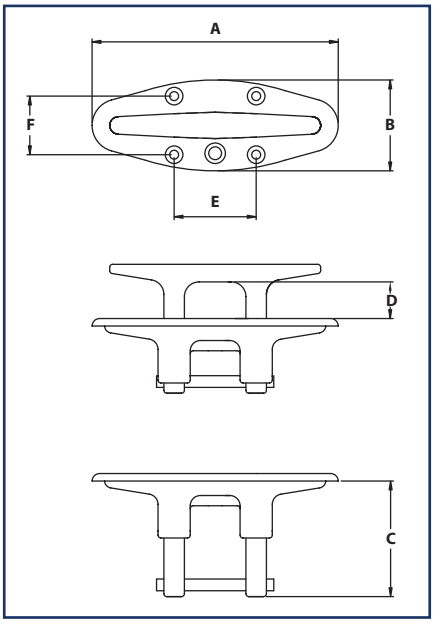

INSTALLATION

- Each cleat is shipped with a backing plate which also serves as the cut-out template.
- Use the supplied backing plate as a template to scribe the outline of the cut-out.
- After cutting out the shape, insert Pop-Up® Cleat into opening and transfer mounting holes from cleat into deck.
- Attach the backing plate and waterproofing cup (if needed) below the deck.
- Attach with four screws (not included) and four nuts (not included). Please see specification chart for screw sizes required.

PRODUCT SPECIFICATIONS / Ca. Maßangaben

BEST.-NR.	260 110 21	260 150 21	260 200 21	260 250 21
Größe	4 1/2"	6"	8"	10"
Gewicht	1 lb.	1.5 lb.	2.5 lb.	4.2 lb.
"A" Länge mm	132	170	230	275
"B" Breite mm	48	60	70	85
"C" Höhe mm	76	76	95	110
"D" Abstand	22	25	29	35
"E" Lochabstand mm	44	57	70	95
"F" Lochabstand mm	32	38	45	60
Max Line Size Ø mm	12	15	19	25

SCREWS REQUIRED

Quantity	4	4	4	4
Diameter	3/16"	1/4"	1/4"	5/16"

Pop-Up® Cleat Optional Items





Erhältliche Gegenplatten

TOP-MOUNT BACKING PLATES

BEST.-NR. #	DESCRIPTION
260 202 4TMP	4 1/2" Top mount backing plate
260 202 6TMP	6" Top mount backing plate
260 202 8TMP	8" Top mount backing plate
260 202 10TMP	10" Top mount backing plate

FEATURES

- ✦ Allows for easy installation from above the deck.
- ✦ No need for access below the deck.

Wassersammler mit Schlauchanschluss

OPTIONAL WATERPROOFING CUS

BEST.-NR. #	DESCRIPTION
260 110 12	4 1/2" Waterproofing Cup
260 150 12	6" Waterproofing Cup
260 200 12	8" Waterproofing Cup
260 250 12	10" Waterproofing Cup

FEATURES

- ✦ Prevents unwanted water runoff below deck.

INSTALLATION

- ✦ Place the template (backing plate) in the desired location. Make sure that there is adequate clearance for the Pop-Up® mechanism below the deck.
- ✦ Trace the cleat cut-out area and spot the small threaded hole. Do not spot the four mounting holes yet.
- ✦ Cut out the cleat installation area.
- ✦ Drill a 3/16" diameter hole for the #6 screw.
- ✦ Place cleat in cut-out and spot the four mounting holes.
- ✦ Remove the cleat and drill the four mounting holes.
- ✦ Place the backing plate through the cut-out and install the #6 screw through the deck into the backing plate. Be careful not to drop the backing plate down into the hull. Do not over tighten the #6 screw.
- ✦ Replace the cleat into the cut-out and install the four mounting screws through the cleat and deck into the backing plate.

Weitere Modelle finden Sie hier.

Wide-Line Cleats



FEATURES

- Sleek, low profile appearance.
- Large flange helps cover rough cut-out area.
- Made of marine grade 316 stainless steel.
- Mounts from the bottom via welded stainless steel threaded studs.


INSTALLATION

- Each cleat is shipped with a backing plate which also serves as the cut-out template.
- Drill four holes and saw-cut clearance between the two center holes.

OPTIONAL WATERPROOFING CUP

- Prevents unwanted runoff below deck
- Specify product number when ordering:

260 305 4C (4 1/2")
260 305 6C (6")
260 305 8C (8")
260 305 10C (10")

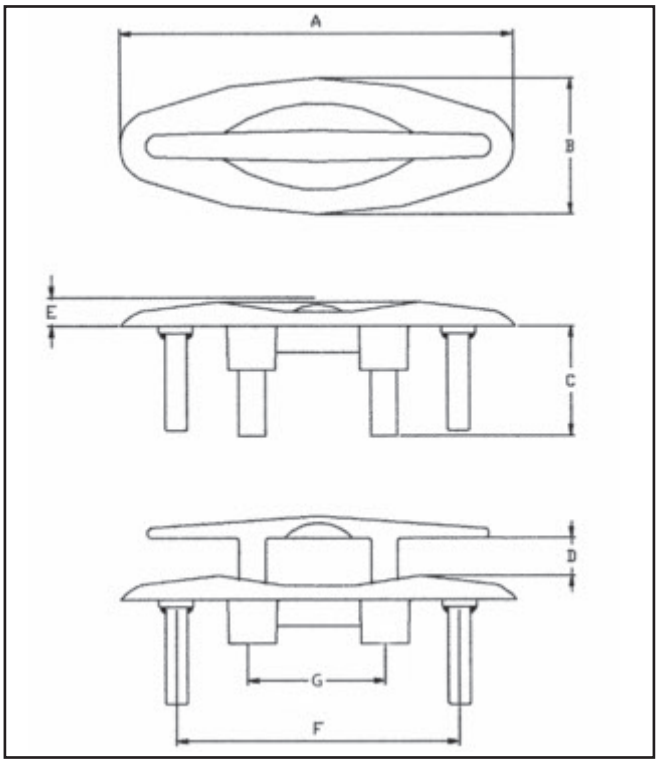


PRODUCT SPECIFICATIONS / Ca. Maßangaben

BEST.-NR. #	260 305 4	260 305 6	260 305 8	260 305 10
Größe	4 1/2"	6"	8"	10"
Gewicht	0.82 lbs.	1.34 lbs.	2.70 lbs.	5.04 lbs.
"A" Länge mm	135	175	230	280
"B" Breite mm	50	60	72	90
"C" Höhe mm	65	76	94	121
"D" Abstand mm	13	18	26	26
"E" Höhe mm	10	13	17	21
"F" Lochabstand mm	95	125	155	190
"G" Abstand mm	45	59	76	98
Thread Size	5/16-18	3/8-16	3/8-16	1/2-13
Stehbolzen mm	41	48	67	76
Max Line Size Ø mm	9	14	19	25

SLIM-LINE™ CLEATS





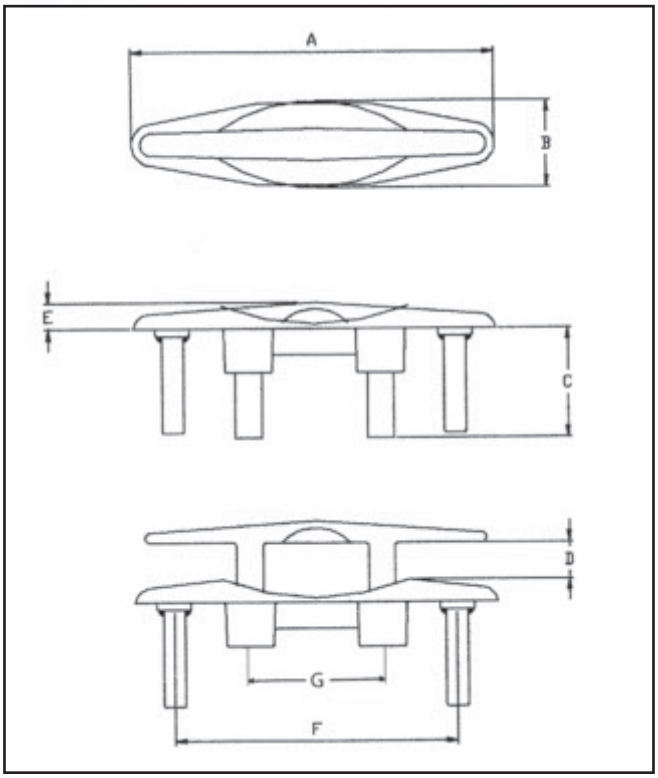

FEATURES

- Sleek, narrow design allows for installation where other flush-mounted cleats won't fit.
- Made of marine grade 316 stainless steel.
- Easy to pull up – the recess in the base allows the cleat to be grasped quickly and easily.

INSTALLATION

- Each cleat is shipped with a backing plate which also serves as the cut-out template.
- Drill four holes and saw-cut clearance between the two center holes.

OPTIONAL WATERPROOFING CUP

- Prevents unwanted runoff below deck
- Specify product number when ordering:

260 304 4C	**(4 1/2")**
260 304 6C	**(6")**
260 304-8-C	**(8")**
260 304 10C	**(10")**

PRODUCT SPECIFICATIONS / Ca. Maßangaben

BEST.-NR. #	**260304-4**	**260 304 6**	**260 500 12**	**260 304 10**
Größe	4 1/2"	6"	8"	10"
Gewicht	0.82 lbs.	1.34 lbs.	2.70 lbs.	5.04 lbs.
"A" Länge mm	127	160	230	280
"B" Breite mm	33	38	50	71
"C" Höhe mm	46	54	69	84
"D" Abstand mm	14	20	25	25
"E" Height mm	13	14	18	22
"F" Lochabstand mm	95	125	155	190
"G" Distance mm	45	59	76	95
Thread Size	5/16-18	3/8-16	3/8-16	1/2-13
Stehbolzen mm	41	47	67	72
Max Line Size Ø mm	12	15	19	25

12" Pull-Up Cleat



260 205 12



260 205 12


BEST.-NR. #	DESCRIPTION
260 205 12	12" Pull-Up Cleat 340 mm Klampe

FEATURES

- Marine grade 316 stainless steel.
- Each cleat is supplied with a waterproofing cup.

INSTALLATION

- Each cleat is shipped with a backing plate which also serves as the cut-out template.
- Fasten with four 5/16" diameter screws (not included).

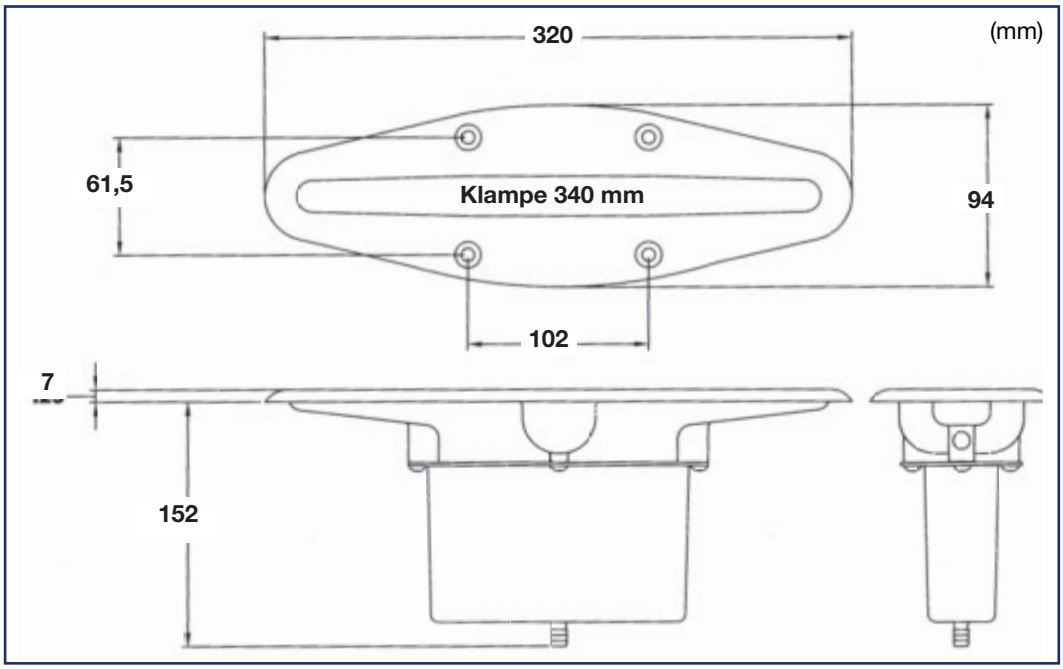

15" Pull-Up Cleat



260 115 15S



260 115 15S


BEST.-NR. #	DESCRIPTION
260 115 15	15" Pull-Up Cleat – Through-Bolted 380 mm Klampe
260 115 15S	15" Pull-Up Cleat – Stud Mount

FEATURES

- The largest flush-mounted cleat available!
- Marine grade 316 stainless steel.
- Available in both stud mount and through-bolt versions.
- Stud length is 4" on 260 115 15S.
- Each cleat is supplied with a waterproofing cup.

INSTALLATION

- Each cleat is shipped with a backing plate which also serves as the cut-out template.
- Fasten with four 3/8" diameter screws (not included).

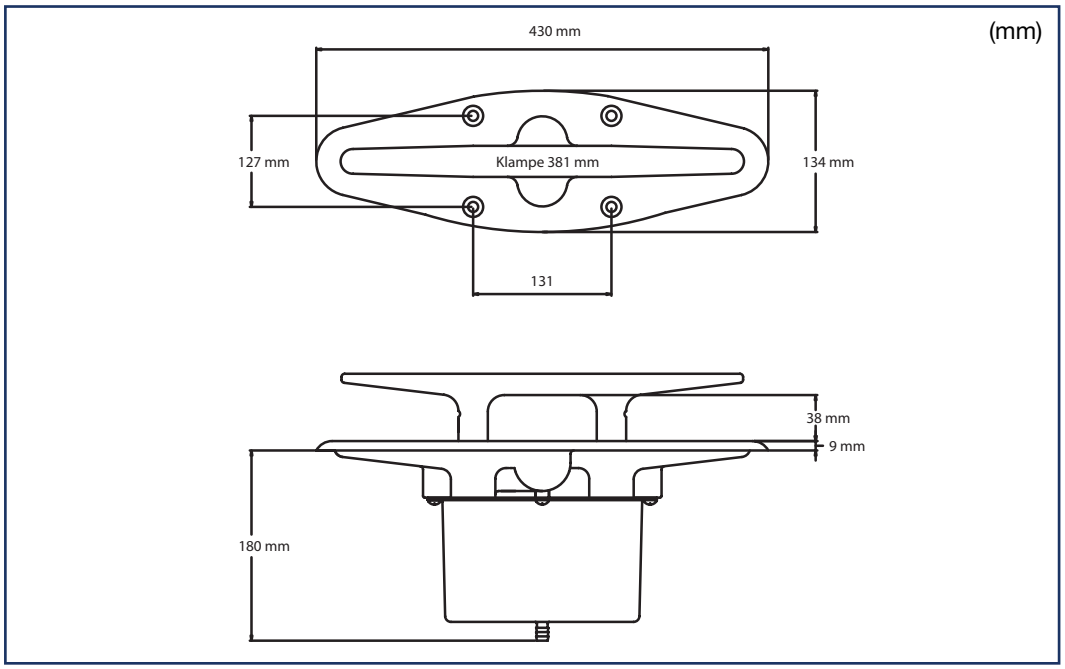

460 Style Pull-Up cleats





PULL-UP CLEAT SERIES 460

FEATURES


- No cut-out required
- Mounded base allows water to run off the cleat
- Made of marine grade 316 stainless steel

INSTALLATION

- Drill two holes with a hole saw, as specified for each cleat size in the chart below.
- Install cleat through holes in deck.
- Install external tooth lock washer (smooth side up) against the deck. The sharp edges should grab the nut flange and dig in.
- A thread lock product such as Loctite™ or similar product will insure that the nuts will not loosen.

PRODUCT SPECIFICATIONS / Ca. Maßangaben

BEST.-NR. #	260 460 4	260 460 6	260 460 8
Größe	4 1/2"	6"	8"
Gewicht	0.80 lbs.	1.2 lbs.	2.56 lbs.
"A" Länge mm	114	152	203
"B" Breite mm	29	38	50
"C" Tiefe mm	50	58	78
"D" Abstand	19	25	32
"E" Leg Distance mm	45	60	81
Hole Size	3/4"	7/8"	1 1/8"
Max Line Size Ø mm	12	19	25
Thread Size	3/4-16	7/8-14	1 1/2-14

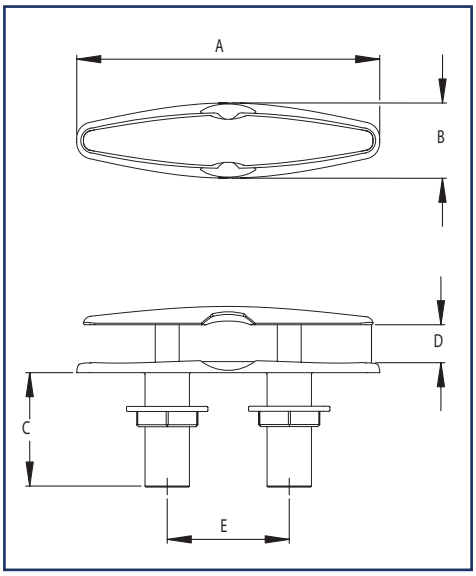

Weitere Modelle finden Sie hier.


Pop-Up® Lights





260 204 M

BEST.-NR. #	DESCRIPTION
260 204 M	Stainless Steel Pop-Up® Buglicht Rot/Grün
260 205 M	Stainless Steel Pop-Up® Backboard
260 260 M	Stainless Steel Pop-Up® Steuerbord
260 207 M	Set of Stainless Steel Pop-Up® Seitenmontage
260 300 12	Stainless Steel Pop-Up Buglicht weiß
260 204 MC	Wassersammler (für alle geeignet)

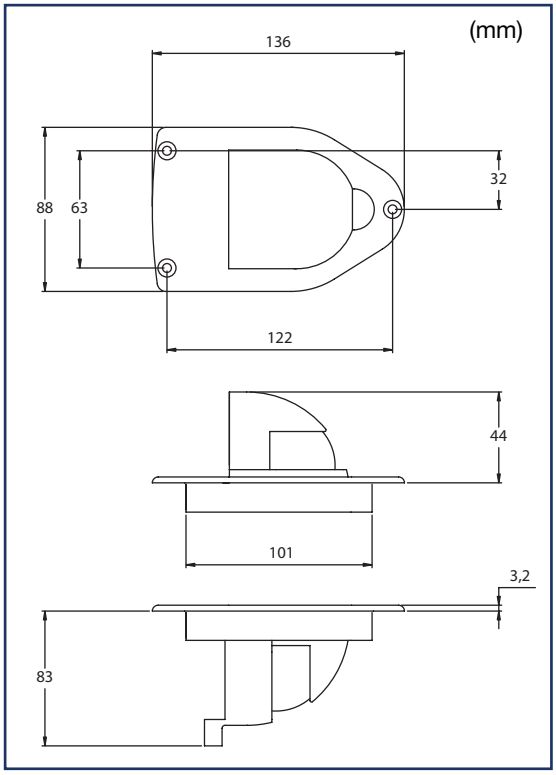

FEATURES

- Keeps deck free of protruding lights.
- Marine grade 316 stainless steel.
- Bow, port, starboard and side lights are available.
- Folds down flush when not in use.
- Uses a #78 bulb, 12 volts, 2.5 watts
- USCG approved 1 nautical mile.
- NMMA type accepted.
- Meets 72 Colregs.

INSTALLATION

- Each light is supplied with a cut-out template.
- Use the supplied template to make a cut-out where the light will go.
- Fasten with three #10 screws (not included).



260 260 M
Auf Deck montage



260 207 M
Seitenmontage



260 204 MC
Wassersammler für Schlauchanschluss

Diese Leuchten sind nicht BSH zugelassen!

LED Pop-Up® Bow Light






BEST.-NR. #	DESCRIPTION
260 211 M	Pop-Up® LED Buglicht Rot/Grün
260 211 MC	Wassersammler

FEATURES

- Fits in the same cut-out as our 204M light for easy upgrading.
- USCG approved 2 nautical miles.
- Keeps deck free of protruding lights, folds down flush with deck when not in use.
- Made of marine grade 316 stainless steel.
- An optional plastic cup prevents unwanted water runoff below deck.
- 115 milli-amps.

INSTALLATION

- Each light is supplied with a cut-out template.
- Use the supplied template to make a cut-out where the light will go.
- Fasten with three #10 screws (not included).

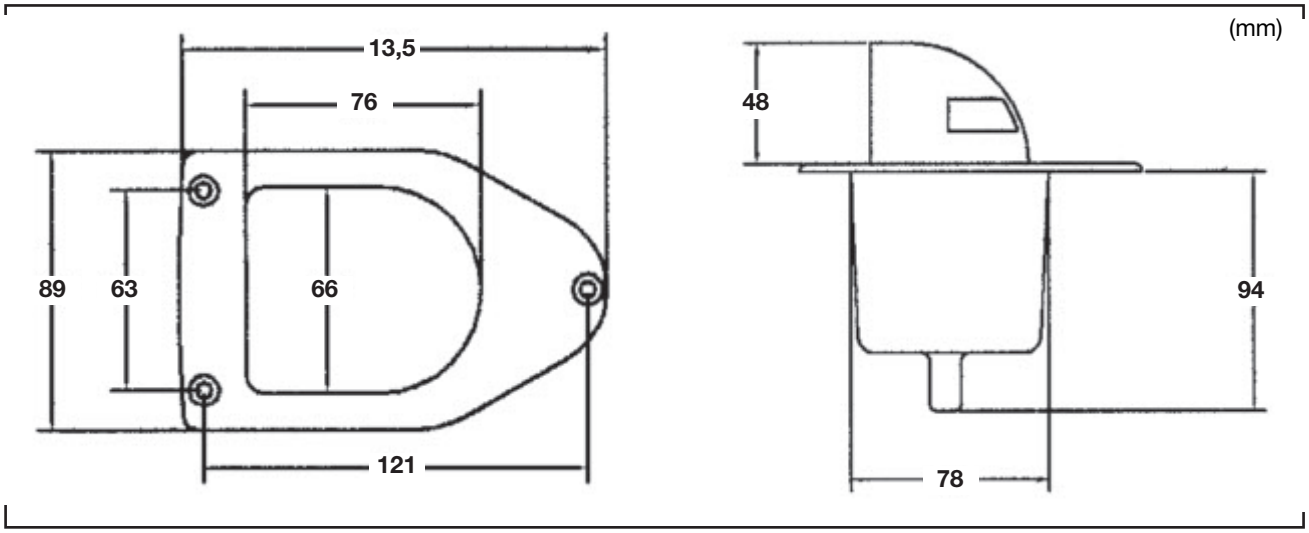

Diese Leuchten sind nicht BSH zugelassen!

LED POP-UP® BOW LIGHT







POP-UP® LED BOW LIGHT


BEST.-NR. #	DESCRIPTION
260 210 M	Pop-Up® LED Bugleuchte Rot/Grün
260 210 MC	Wassersammler
260 210 MS	Buglicht mit Stehbolzen Montage

FEATURES

- USCG Approved 2 nautical miles.
- The only Pop-Up® LED light on the market.
- Keeps deck free of protruding lights, folds down flush with deck when not in use.
- Made of marine grade 316 stainless steel.
- An optional plastic cup prevents unwanted water runoff below deck.
- Available in stud-mount or though bolt versions.

INSTALLATION

- Drill a 3 1/2" diameter hole using a hole saw.
- Fasten with three #10 screws (not included).

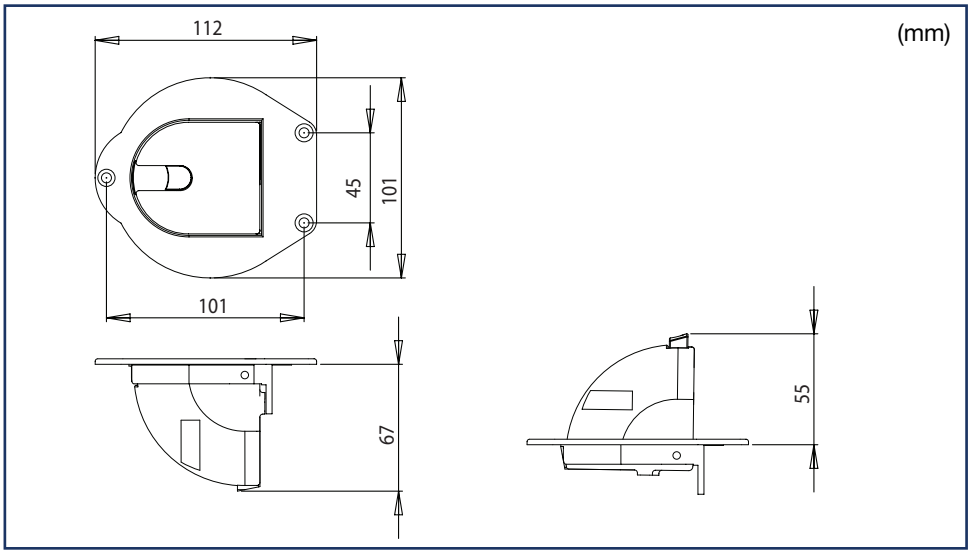

Diese Leuchten sind nicht BSH zugelassen!