Bluefin LED Underwater lights.

GW20IFM/GW48CCIFM Installation manual.

Thank you for choosing Bluefin LED underwater lights, our products have been designed and tested to ensure optimum performance and longevity is maintained.

All Bluefin Led lights are water tested so please be aware there may be moisture present on the light.

This light is designed for use on fibre glass hulls only and **not to be mounted to any Metal hull or your warranty will be void. If you are mounting to a Metal hull boat a Delrin isolation sleeve can be purchased.**

Please ensure that your product is installed as per our instructions below, failure to do so may invalidate your warranty.

If you are installing a GW48CCIFM please refer to the Driver instructions for electrical installation.

Specification: electrical/fuse ratings

	Voltage	Current	Fuse rating
Great White GW20IFM	24V only **(Absolute min of 19V under load @ light).**	24v-5.1	8amp

Warnings:

- Do not attempt to install the lights whilst the boat is in the water.
- Ensure that the correct voltage is used for the light.
- Ensure that an in line fuse is installed with the correct fuse rating per the light installed.
- Ensure that the supplied gel connector is used to make a watertight connection or your **warranty will be Void.**
- **Do not remove the inline HYDRO LOCK or your warranty will be void.**
- Do not hold the light by the cable.
- Do not use abrasives on the lenses.
- Do not stare into the LED light at close proximity
- Lights must be mounted a minimum of 300mm from any Anodes.
- Do not mount lights directly underneath Anodes.
- Do not bond directly to Anodes.
- Only bond to the vessels DC bonding system & ensure all connections are in perfect condition & are regularly checked.
- When mounting on any type of conductive surface or hull material full electrical isolation between the light & mounting surface must be provided & maintained at all times throughout the lights life.
- Failure to adhere to any of these requirements will invalidate warranty.
- As Galvanic currents & corrosion are external factors any type of damage caused by galvanic affects are not covered by BluefinLEDs warranty policy.

Tools required for installation:

- 101mm(4”) hole saw
- Drill
- Marine sealant 3M 5200/4000UV, Sika flex 291i or equivalent (**do not use 3M 4200**)

Installation:

For optimum affect effect the light should be positioned between 8-12” (200-300mm) below the water line and at a 90 deg angle. Recommended spacing from 3-3”(1mtr) to 5-11” (1.8mtrs) between the lights.

Drill a 101mm (4”) hole for the light access through the hull, ensuring that there are no obstructions internally in the hull.
Key the area to where the light is to be mounted with abrasive sand paper to ensure there is a clean area for the marine sealant to bond too.
Apply marine sealant to the rear of the light on the circumference of the light and around the base of the tube to ensure a complete continuous bead of sealant is applied in both areas. (See fig 2)
Feed the light through the hole and clamp internally in the hull using the clamping ring and washer supplied ensuring a tight fit using nuts and bolts supplied. (See fig 3 and 4)
Wipe off any excess sealant and ensure the light is seated correctly without any gaps in the sealant. (It is good practice to have excess marine sealant to clean off as this can ensure that there is a water tight seal to the hull)

Electrical connection:

Ensure you use the IP68 GEL CONNECTOR supplied to connect to the boats wiring or you Warranty will be void (fig 6/7).

You will notice an inline HYDRO LOCK attached to your cable (Fig 1). If this guard is removed you warranty will be void

It is advised that if installing GW16 models no more than 8 lights should be installed on your low voltage system.

If installing more than 8 GW16 models we suggest using our Mains Upgrade Power Supply (contact your local Bluefin Led dealer for further information)

It is advised that if installing GW20 or GW48CC Models no more than 6 lights should be installed on your low voltage system.

If installing more than 6 GW20 or GW48CC models we suggest using our Mains Upgrade Power Supply (contact your local Bluefin Led dealer for further information)

Care should be taken when planning your electrical feeds/cables to the lights so as to ensure voltage drop between the batteries or power supply is minimised, on 12V systems this is especially important as the lower system voltage means a high current requirement which in turn means the potential for more voltage drop in the cable runs & connections.
If the cable gauge & connections are not sufficient for the lighting load attached you may experience incorrect operation of the lights & intermittent illumination as the supply dips below specification.
Please see the wire gauge guide attached to the instruction manual.
For help with calculations always consult with a qualified professional or contact Bluefin LED directly.

Fig 1



Attach the light cable to the VDC power on the boat ensuring that you use the in line fuse supplied connected to the positive(red) wire, ensure that you use the heat shrink provided to create a water tight fit into the fuse holder. (See fig 5)
Ensure that an earth bond cable is attached to the earth bolt on the locking ring and is attached to the earth bonding system on the boat. (See fig 3)

Fig 2



Fig 3

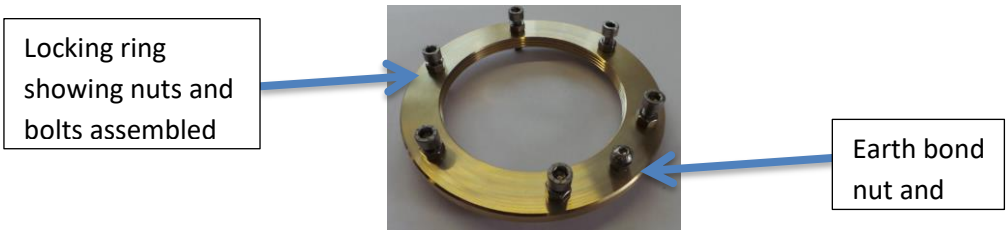


Fig 4

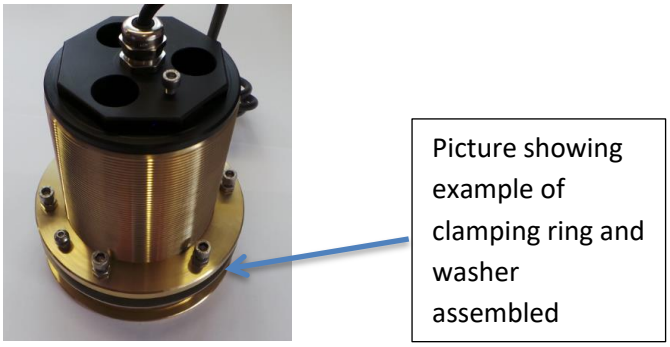


Fig 5

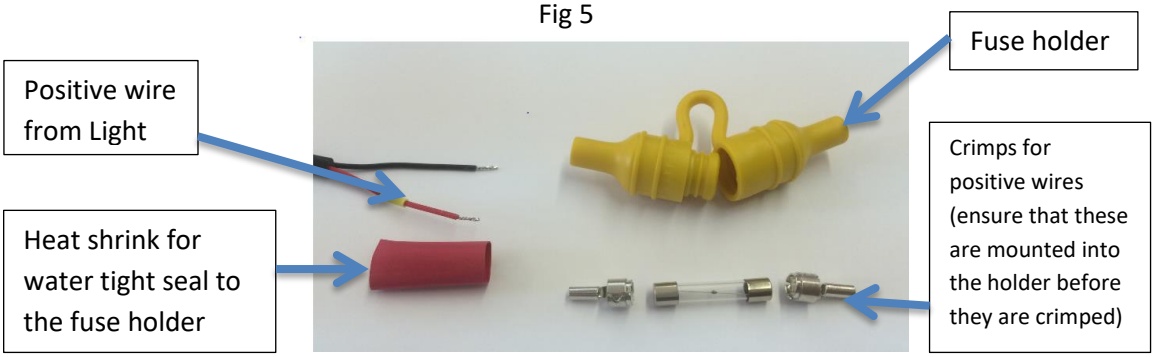


Fig 6 showing how the Gel connector is wired up.

Fig 7 showing how the finished Gel connector should look when finished.

Ensure that the black outer sheath is inside the gel connector.

The IP68 GEL CONNECTOR MUST BE INSTALLED CORRECTLY OR YOU WARRANTY WILL BE VOID.

Fig 6

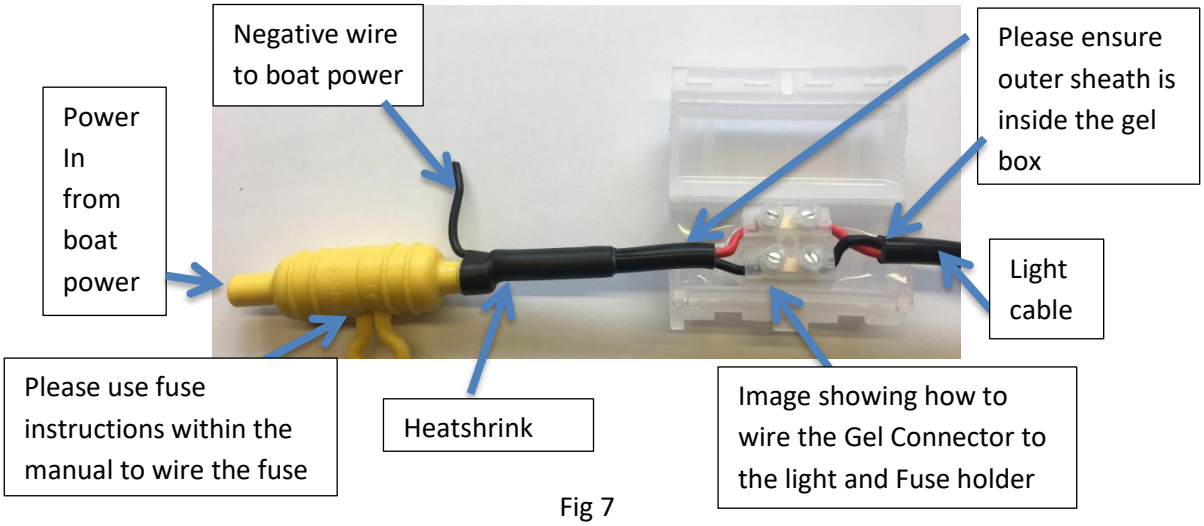


Fig 7



Bluefin Led Underwater lights.

LM48CC Driver Installation manual.

Thank you for choosing Bluefin LED underwater lights, our products have been designed and tested rigorously to ensure the optimum performance and longevity.
Please ensure that your product is installed as per our instructions below, failure to do so may invalidate your warranty.

Specs: electrical/fuse ratings

	Voltage	Current	Fuse rating
LM48CC Drivers	24V only	24V-6.5	8amp

Warnings:

- Do not attempt to install the lights whilst the boat is in the water.
- Ensure that the correct voltage is used for the light and Driver.
- Ensure that the in line fuse is installed with the correct fuse rating per the Driver installed.
- Ensure that the supplied gel connector is used to make a watertight connection or your **warranty will be Void.**
- If you wish to connect your Colour change lights and drivers to your own DMX Controller please contact BluefinLED beforehand for further advise.

Installation:

Electrical connection:

- Ensure that the supplied gel connector is used to make a watertight connection or your **warranty will be Void (see fig 6/7)**
- Attach the Driver power cable to the VDC power on the boat ensuring that you use the in line fuse supplied connected to the positive(red) wire, ensure that you use the heatshrink provided to create a water tight fit into the fuse holder. (see fig 2)
- Plug the Light cable connector to driver as per Fig 1 aligning the white lines on the connectors to ensure the connector pushes home correctly.
- Plug the DMX controller cable (if supplied fig 3) into the first driver DMX IN connector as per Fig 1.
- Plug the DMX Interlink cable (Fig 4) into the DMX OUT connector on the first driver Fig 1.
- You can now daisy chain the drivers using the DMX Interlink cables going from the OUT DMX to the IN DMX on the next driver.
- When completing a circuit you must plug the DMX Terminator plug (Fig 5) into the last drivers DMX OUT to complete the circuit.

Fig 1 (Driver)



Fig 2 (Fuse connection)

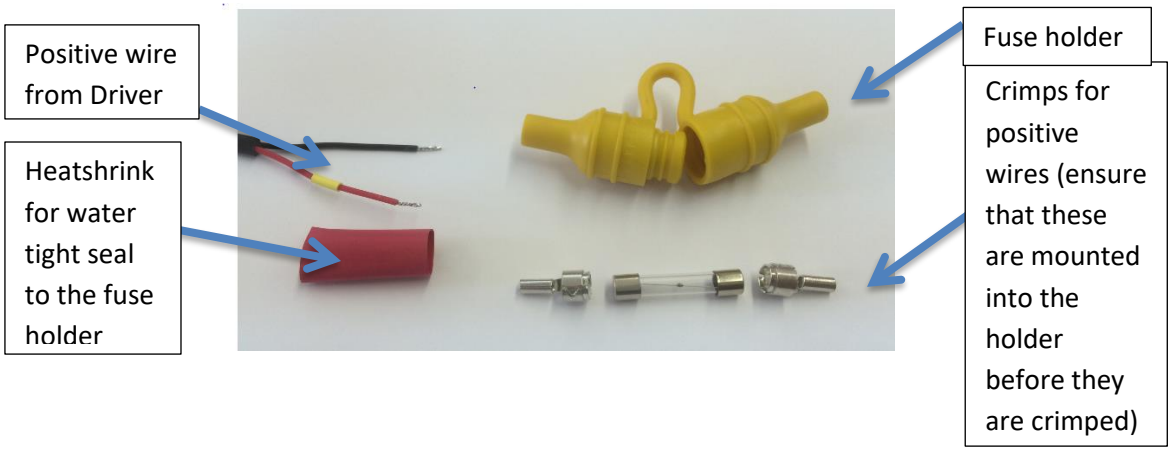


Fig 3 (DMX Controller cable)



Fig 4 (DMX Interlink cable)



Fig 5 (DMX Terminator)



Fig 6 showing how the Gel connector is wired up.

Fig 7 showing how the finished Gel connector should look when finished.

Ensure that the black outer sheath is inside the gel connector.

The IP68 GEL CONNECTOR MUST BE INSTALLED CORRECTLY OR YOU WARRANTY WILL BE VOID.

Fig 1


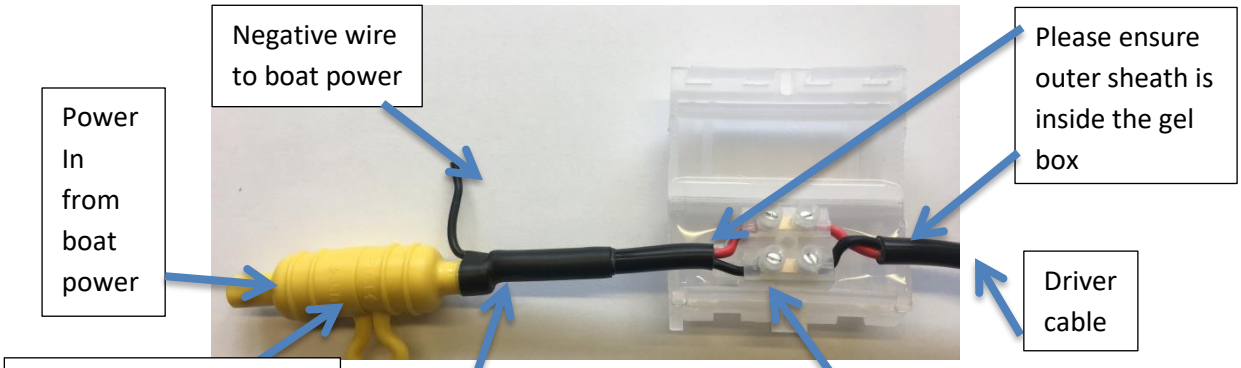


Fig 2

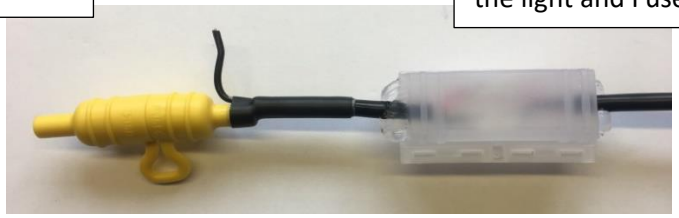

Testing:

Test the light before installation ensuring that you use the correct voltage and the light is illuminated correctly.

After installation ensure again that the light is illuminated correctly before the boat goes back into the water and you remove the lens label.
After you boat goes back into the water check internally for water tightness around where the light is installed.
The light has internal indicator Led's for fault finding, these are as follows:

- Over voltage will flash red.(check the voltage to the light)
- Under voltage will show a constant red. (check the voltage to the light)
- Over temperature will show amber.(allow the light to cool down and check if submerged)

Maintenance:
Regularly check the installation for water tightness
Only clean the light with a soft bristle brush
Warranty:
For any warranty issues please contact your point of sale retailer or go to www.bluefinled.com for further advice.

Bluefin LED LTD warrants the lights/hardware it manufactures and produces to be free from defects in workmanship and materials for a period of two years, starting from the date of original purchase, as recorded on the sales receipt.
The warranty is non-transferable and limited to the original purchaser of the product. During the two year warranty period Bluefin LED will repair or replace the defective item (at its option) at no additional charge on a "like for like" basis. Products either repaired or replaced under this warranty shall only be warranted for the unexpired portion of the warranty applying to the original product(s).
Bluefin LED is not responsible for labour charges to remove or replace lights or for haul-out fees. No refunds will be given.
This limited warranty does not extend to any products which have been damaged as a result of misuse, abuse, improper installation/modification, galvanic corrosion, failure to follow and adhere to installation instructions provided by Bluefin LED, improper shipping, neglect, damage caused by disasters such as fire, flood, lightning "acts of god", installation by unqualified personnel.
Do not attempt to disassemble the light without Bluefin LED advice.
Installer please ensure that the SERIAL NUMBERS of the lights are written below and the manual is handed over to the end user.
Please make a note of the serial numbers of the lights here.
SERIAL NUMBERS

Bluefin LED
Cottage Farm, Cottage Lane,
Norton Juxta Twycross, Atherstone. CV9 3QH

Sales - Tel: 07950 909048 **Email:** simon.steadman@bluefinled.com
Service - Tel: 01827 880450 **Email:** mark.branson@bluefinled.com
Administration - Tel: 01827 880450 **Email:** samantha.barrie@bluefinled.com
Registered Address: Square Rig Limited, t/a Bluefin LED, Cottage Farm, Cottage Lane, Norton Juxta Twycross, Atherstone, CV9 3QH
Company Registration Number: 08871451 **VAT Number: 179 2690 64**

Wire Gauge selection guide using information from ABYC E-11 & US Coast Guard guidelines for marine electrical installations

Circuit Type				Current flow in Amps																			
10% V Drop Low-Power Non Critical (P series Single colour)		3% V Drop High-Power/Critical (H, S & GW Plus colour change Series)		5A		10A		15A		20A		25A		30A		40A		50A		60A	
20ft	6m	6ft	2m	16 AWG	1.5mm CSA	16AWG	2.5mm CSA	14AWG	4mm CSA	14AWG	4mm CSA	12AWG	4mm 6mm	10AWG	6mm CSA	8AWG	10mm CSA	6AWG	16mm CSA	6AWG	25mm CSA
30ft	9m	10ft	3m			14AWG		12AWG		12AWG		10AWG							25mm CSA	4AWG	40mm CSA
50ft	15m	15ft	5m			12AWG	4mm CSA	10AWG	6mm CSA	10AWG	6mm	8AWG	10mm CSA	8AWG	10mm	6AWG	16mm CSA	4AWG	40mm CSA	2AWG	70mm CSA
65ft	20m	20ft	6m	14AWG	2.5mm CSA	10AWG	6mm CSA			8AWG	10mm CSA	6AWG	16mm CSA	6AWG	16mm CSA	4AWG	25mm CSA	2AWG	1AWG		
80ft	24m	25ft	8m	12AWG				8AWG	10mm CSA	6AWG	16mm CSA	4AWG	25mm CSA	4AWG	25mm CSA	2AWG	40mm CSA	1AWG	70mm CSA	0AWG	
100ft	30m	30ft	9m			8AWG	10mm CSA	6AWG	16mm CSA	4AWG	25mm CSA	2AWG	40mm CSA	2AWG	40mm CSA	1AWG	70mm CSA	0AWG		2|0 AWG	
130ft	40m	40ft	12m	10AWG		6AWG	16mm CSA	4AWG	25mm CSA	2AWG	40mm CSA	1AWG	70mm CSA	1AWG	70mm CSA	0AWG		2|0 AWG		3|0 AWG	
165ft	50m	50ft	15m		4mm CSA		25mm CSA		40mm CSA			0AWG		0AWG		2|0 AWG		3|0 AWG		4|0 AWG	
200ft	61m	60ft	18m	8AWG		4AWG		2AWG		1AWG	70mm CSA			2|0 AWG		3|0 AWG		4|0 AWG			
		70ft	21m				40mm CSA														
		80ft	24m	6AWG	6mm CSA	2AWG		2AWG	40mm CSA	1AWG		0AWG		2|0 AWG		3|0 AWG		4|0 AWG			
		90ft	27m																		
		100ft	30m																		
		110ft	34m																		
		120ft	37m																		
		130ft	40m																		

To use for BluefinLED underwater lights select the appropriate current Colum for you lights, power & quantity from the top row.

then the cable distance run in one direction i.e. from panel or batteries to the light placement or group.

Then at the point the Colum & row crosses read the cable suggestion in US or EU gauges for your installation.

Failure to install the correct power feeds may invalidate your warranty, if in doubt please consult with BluefinLED or a qualified professional.